



2001 Technology Incorporated
Since 1989

Powerhouse for
**Accessories
& Peripherals**

For all categories of
electronic devices

Products Trending **Now**



Happy to see you again!

After 3 years of absence due to the pandemic we have emerged stronger and more resilient. This year as we celebrate our 34th year since establishment, our vision of the future of this industry has never been clearer and our commitment to the market has never been firmer. Those tasks that we embarked upon to upgrade and expand our operations before the pandemic are now all in full swing.

Our service quality without further elaboration have certainly excelled beyond expectations; and our pledge to delivering products only of the highest quality and safety standards have never been more steadfast.

We take this opportunity to thank you for your continued support even at a time when physical encounter seemed virtually impossible, because in reality we were never away or too far apart.

Thank you.
From our sales team and management



"Out of suffering have emerged the strongest souls; the most massive characters are seared with scars." KHALIL GIBRAN



2001 Technology & Accessories Incorporated
Powerhouse for
Accessories & Peripherals
For all categories of
electronic devices



2001 Technology Incorporated
Since 1989



100W GaN

T338C3Q-100W (3PD+1QC)

Type-C PD3.0 & QC3.0 GaN

Input : AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A **(100W)**
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A **(100W)**
- USB-C3 PD: DC 5V 3A / 9V 3A / 12V 2.5 / 15V 2A / 20V 1.5A **(30W)**
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

4 ports charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 15V 3A / 20V 3.25A **(65W)**
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- USB-C3 PD: DC 5V 1.5A **(7.5W)**
- USB-A1 : DC 5V 1.5A **(7.5W)**



100W GaN

T338C2Q-100W (2PD+1QC)

Type-C PD3.0 & QC3.0 GaN

Input : AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A **(100W)**
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A **(100W)**
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

3 ports charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 15V 3A / 20V 2.25A **(45W)**
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**



100W GaN

T321C2W2-100W (2PD+2USB)

Type-C PD3.0 & Smart USB GaN

• Input : AC 100-240V

Single port charging:

- USB-C1 PD : DC 5V 3A / 9V 3A / 15V 3A / 20V 5A **(100W)**
- USB-C2 PD : DC 5V 3A / 9V 2A **(18W)**
- USB-A1 : DC 5V 2.4A **(12W)**
- USB-A2 : DC 5V 2.4A **(12W)**

4 ports charging:

- USB-C1 PD : DC 5V 3A / 9V 3A / 15V 3A / 20V 3.25A **(65W)**
- USB-C2 PD : DC 5V 3A / 9V 2A **(18W)**
- USB-A 1&2 : DC 5V 2.4A max for each port, Total 5V 3.4A **(17W)**



65W GaN

T201C-PD65W (1PD)

65W USB Type-C PD3.0 GaN

Input : AC 110-240V

• 1 USB-C PD:

DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**



65W GaN

T201CW-65W (1PD+1USB)

Type-C PD3.0 & Smart USB

Input : AC 110-240V

Single port charging :

- 1 USB-C PD:
DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
- 1 USB-A Smart: DC 5V 2.4A **(12W)**

2 ports charging :

- 1 USB-C PD:
DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 **(45W)**
- 1 USB-A Smart: DC 5V 2.4A **(12W)**



65W GaN

T329C2Q-65W (2PD+1QC)

3 Ports USB-C PD3.0 & QC3.0 GaN

• Input: AC 100-240V

Single port charging :

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.25A **(27W)**
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

3 ports charging :

- USB-C2: DC 5V 3A / 9V 3A / 12V 2.5A / 15 2A / 20V 1.5A **(30W)**
- USB-C1+A1: Total 5V 3A **(15W)**





65W GaN

T184CQ-65W (1PD+1QC)

USB-C PD3.0+PPS & QC3.0 GaN

Input : AC 100-240V

Single port charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
PPS: 3.3-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 **(45W)**
- 1 USB-A : DC 5V 2.4A **(12W)**



45W GaN

T175C-PD45W (1 PD)

USB-C PD3.0 + PPS GaN

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A **(45W)**
PPS : 3.3-11V 4.05A / 3.3-16V 3A / 3.3-21V 2.25A



50W GaN

T298C2-50W (2PD)

Dual USB-C PD3.0 + PPS GaN

Input : AC 100-240V

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A **(30W)**
PPS: DC 3.3-11V 3A ; 3.3-16V 2A
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- Power: **50W**



45W GaN

T200C2-45W (2PD)

Dual USB-C PD3.0 GaN

Input: AC 110-240V

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A **(45W)**
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A **(45W)**
- USB-C1+C2: PD24W+PD24W (5V 3A / 9V 2.5A / 12V 2A / 15V 1.5A)



45W GaN

T298CQ-45W (1PD+1QC)

USB-C PD3.0+PPS & QC 3.0 GaN

Input : AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A **(45W)**
PPS: 3.3-11V 3A / 3.3-16V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A **(30W)**



40W

T200C2-40W (2PD)

Dual USB-C PD3.0

Input : AC 110-240V

- USB Type-C1 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- USB Type-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- Power : **40W**

04



36W GaN

T300CQ-36W (1PD+1QC)

USB-C PD 3.0 & QC3.0 GaN

Input: AC 100-240V

Single Port Charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 2.4A / 20V 1.8A (36W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 Ports Charging:

- 1 USB Type-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A / 15V 1.33A / 20V 1A (20W)
- 1 USB-A Smart: DC 5V 2.4A (12W)



30W

T114C-PD30W (1PD)

USB-C PD 3.0+PPS

Input: AC 100-240V

- 1 USB-C PD : DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
PPS Output: 3.3-11V 3A / 3.3-16V 2A



35W GaN

T175C2-35W (1PD+1C) Mini

USB Type-C PD3.0+PPS

Compatible with PPS/QC

Input : AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.91A / 15V 2.33A / 20V 1.75A (35W)
PPS: 3.3-11V 3A
- USB-C2: DC 5V 2A (10W)

2 ports charging:

- USB-C1 PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
- USB-C2 : DC 5V 2A (10W)



30W GaN

T291C-PD30W (1PD) Mini

Mini shape USB-C PD 3.0 GaN

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)



30W

T152CQ-30W (1PD+1QC)

USB-C PD 3.0+PPS & QC 3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
PPS output : 3.3V-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3A (15W)



18W

T105Q-18W (1QC)

USB-A QC3.0 and Auto detection

1 USB-C PD 3.0 and compatible with PPS/QC

Input: AC 100-240V

- 1 USB-A QC: DC 3.6-6.5V 3A / 6.5-9V 2A / 9-12V 1.5A (18W)



25W

T290C-PD25W (1PD)
USB Type-C PD3.0+PPS

Input: AC 100-240V

- 1 USB Type-C P: DC 5V 3A / 9V 2.77A **(25W)**
PPS: 3.3V-5.9V 3A / 3.3V-11V 2.25A



20W

T290C-PD20W (1PD)
USB-C PD3.0 compatible with QC3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**



25W

T290CQ-25W (1PD+1QC)
USB-C PD 3.0+PPS & QC 3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A **(25W)**
PPS: 3.3V-5.9V 3A / 3.3V-11V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A **(18W)**
- 2 Ports Charging: Total 5V 3A (15W)



20W GaN

T290CQ-20W (1PD+1QC)
USB-C PD3.0 & QC 3.0 GaN

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**
- 2 USB ports charging: Total 5V 3A max (15W)



25W

T360C-PD25W (1PD) Mini
USB-C PD3.0+PPS (Mini design)

1 USB-C PD 3.0 and compatible with PPS/QC

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A **(25W)**
PPS : 3.3V-5.9V 3A / 3.3V-11V 2.25A



20W

T360C-PD20W (1PD) Mini
USB-C PD3.0+PPS (Mini design)

1 USB-C PD 3.0 and compatible with PPS/QC

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
PPS: 3.3V-5.9V 3A / 3.3V-11V 2.25A

06

65W GaN

T323C2Q-65W (2PD+1QC)

3 Ports USB-C PD3.0 +PPS & QC 3.0 GaN

Input: AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
PPS:3.3-11V 5A
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**;
PPS:3.3-11V 2A
- USB-A1 QC: DC 5V 3A / 9V 2A **(18W)**

3 ports charging:

- C1= (45W) + C2+A1(15W)



65W GaN

T184C-PD65W (1PD)

USB-C PD3.0 +PPS GaN

Input : AC 100-240V

- 1 USB-C PD:

DC 5V 3A/ 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**

PPS output: 3.3-21V 3A



65W GaN

T184CQ-65W (1PD+1QC)

USB-C PD3.0+PPS & QC 3.0 GaN

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 3A/ 15V 3A/ 20V 3.25A **(65W)**
PPS : 3.3-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

2 ports charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- 1 USB-A : DC 5V 2.4A (12W)



45W GaN

T175C-PD45W (1PD)

USB-C PD3.0+PPS GaN

Input: AC 100-240V

- USB-C PD:

DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A **(45W)**

PPS : 3.3-11V 4.05A / 3.3-16V 3A / 3.3-21V 2.25A



45W

T305C-PD45W (1PD)

USB-C PD3.0+PPS

Input: AC 100-240V

- USB-C PD:

DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A **(45W)**

PPS output : 3.3-5.9V 3A / 3.3-11V 4A



45W

T305CQ-45W (1PD+1QC)

USB-C PD3.0+PPS & QC 3.0

Input: AC 100-240V

Single port charging:

- USB-C PD : DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A **(45W)**
PPS: 3.3-5.9V 3A / 3.3-11V 4A
- USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)



45W

T305C2-45W (2PD)

Dual USB-C PD3.0+PPS

Input: AC 100-240V

Single port charging:

- USB-C1 PD:
DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A **(45W)**
- USB-C2 PD:
DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A **(45W)**
PPS: 3.3-16V 3A

2 ports charging:

- USB-C1 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-C2 PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)



40W

T305C2-40W (2PD)

Dual USB-C PD3.0

Input: AC 100-240V

- USB-C1 PD: DC 5V 3A/ 9V 2.22A /12V 1.67A **(20W)**
- USB-C2 PD: DC 5V 3A/ 9V 2.22A /12V 1.67A **(20W)**
- Power: **40W**



35W GaN

T175C2-35W (1PD+1C)

USB-C PD3.0+PPS GaN

Input: AC 100-240V

Single port charging:

- USB-C1 PD:
DC 5V 3A / 9V 3A / 12V 2.91A / 15V 2.33A / 20V 1.75A (35W)
PPS: DC 3.3-11V 3A
- USB-C2 : DC 5V 2A (10W)

2 ports charging:

- USB-C1 PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
- USB-C2 : DC 5V 2A (10W)



25W

T290C-PD25W (1PD)

USB-C PD3.0+PPS

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
PPS: 3.3-5.9V 3A / 3.3-11V 2.25A



35W

T146C2-35W (2PD)

Dual USB-C PD3.0+PPS

Input: AC 100-240V

- USB-C1 PD:
DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W)
- USB-C2 PD:
DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W)
PPS: DC 3.3-11V 3A
- USB-C1+C2: 35W Max



25W

T290CQ-25W (1PD+1QC)

USB-C PD 3.0+PPS & QC 3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
PPS: 3.3-5.9V 3A / 3.3-11V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3A (15W)



30W

T263CQ-30W (1PD+1QC)

USB-C PD 3.0+PPS & QC 3.0

Input : AC 100-240V

1 USB-C PD output:

- DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
PPS: 3.3-11V 3A / 3.3-16V 2A

1 USB-A QC:

- DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 Ports Charging: Total 5V 3.1A (15.5W)



20W

T290C-PD20W (1PD)

USB-C PD3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)



30W GaN

T233C-PD30W (1PD) Mini

Mini design USB-C PD 3.0+PPS GaN

Input: AC 100-240V

1 USB-C PD:

- DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A/ 20V 1.5A (30W)
PPS: 3.3-5.9V 3A / 3.3-11V 3A



20W

T290CQ-20W (1PD+1QC)


USB-C PD3.0 & QC 3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC output : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : Total 5V 3A (15W)



08

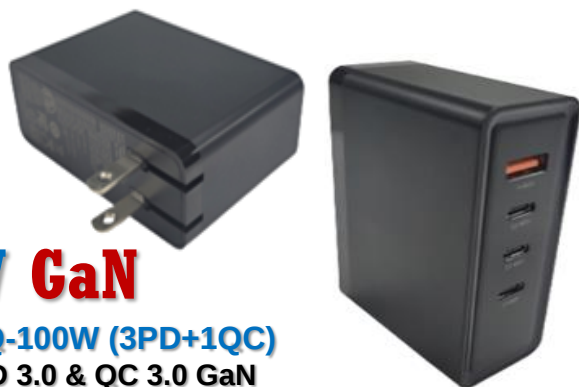

100W GaN

T325C3Q-100W (3PD+1QC)

USB-C PD 3.0 & QC 3.0 GaN

Input: AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A **(100W)**
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A **(100W)**
- USB-C3 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A **(100W)**
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3A **(60W)**

4 ports charging:

- C1(PD45W)+C2(PD30W)+C3+A1(Total 5V 3A ,15W)



35W GaN

T285C2-35W (2PD)

Dual USB-C PD3.0 GaN

Input: AC 100-240V

- USB-C1 PD: DC 5V 3A / 9V 3A / 15V 2.33A / 20V 1.75A **(35W)**
- USB-C2 PD: DC 5V 3A / 9V 3A / 15V 2.33A / 20V 1.75A **(35W)**
- USB-C1+C2: DC PD18W+PD18W

65W GaN

T213C2Q-65W (2PD+1QC)

USB-C PD3.0+PPS & QC 3.0 GaN

Input: AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
- USB-A1 QC : DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3A **(60W)**

3 ports charging:

- C1(45W)+ C2+A1(Total 5V 3A ,15W)



30W

T118CQ-30W (1PD+1QC)

USB-C PD3.0 & QC 3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A **(30W)**
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A **(30W)**
- 2 USB charging: Total DC 5V 4A (20W)



65W GaN

T197CQ-65W (1PD+1QC)

USB-C PD3.0+PPS & QC 3.0 GaN

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)** PPS: 3.3-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

2 ports charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 **(45W)**
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**



25W

T152CQ-25W (1PD+1QC)

USB-C PD 3.0+PPS & QC 3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A **(25W)**
PPS: 3.3-5.9V 3A / 3.3-11V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**
- 2 Ports Charging: Total 5V 3.1A **(15.5W)**



45W

T279CW-45W (1PD+1USB)

USB-C PD3.0+Smart USB

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A **(45W)**
- 1 USB-A: DC 5V 2.4A **(12W)**
- 2 Ports Charging: Total 45W Max



20W

T290CQ-20W (1PD+1QC)

USB-C PD3.0 & QC 3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**
- 2 USB ports charging: Total 5V 3A max **(15W)**





65W GaN

T213C2Q-65W (2PD+1QC)

2 USB-C PD3.0+PPS QC3.0 GaN

Input: AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3A **(60W)**

3 ports charging:

- C1 (45W)+ C2+A1 (Total 5V 3A ,15W)



65W GaN

T213C2Q-65W (2PD+1QC)

2 USB-C PD3.0+PPS QC 3.0 GaN

Input : AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A **(65W)**
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3A **(60W)**

3 ports charging:

- C1 (45W)+ C2+A1(Total 5V 3A,15W)



45W

T136CQ-45W (1PD+1QC)

USB-C PD 3.0+PPS & QC3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 3A / 15V 3A/20V 2.25A **(45W)**
- PPS : 5-11V 3A
- 1 USB-A QC3.0: 5V 3A / 9V 2A / 12V 1.5A **(18W)**

Dual port charging:

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 2.5A /15V 2A/20V 1.5A **(30W)**
- 1 USB-A : 5V 2.4A **(12W)**



45W

T136CQ-45W (1PD+1QC)

USB-C PD 3.0+PPS & QC3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 3A / 15V 3A/20V 2.25A **(45W)**
- PPS : 5-11V 3A
- 1 USB-A QC3.0: 5V 3A / 9V 2A / 12V 1.5A **(18W)**

Dual port charging:

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 2.5A /15V 2A/20V 1.5A **(30W)**
- 1 USB-A : 5V 2.4A **(12W)**



30W

T134C-PD30W (1PD)

USB-C PD 3.0

Input: AC 100-240V

• 1 USB-C PD:

- DC 5V 3A/ 9V 3A/ 12V 2.5A/15V 2A/ 20V 1.5A **(30W)**



30W

T134C-PD30W (1PD)

USB-C PD 3.0

Input: AC 100-240V

• 1 USB-C PD:

- DC 5V 3A/ 9V 3A/ 12V 2.5A/15V 2A/ 20V 1.5A **(30W)**



20W

T123CQ-20W (1PD+1QC)

USB-C PD 3.0 & QC3.0

• Input : AC 100-240V

- 1 USB-C PD : DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- 1 USB-A QC : DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

* 2 USB charging : 5V 1.5A+5V 1.5A **(15W)**



20W

T123CQ-20W (1PD+1QC)

USB-C PD 3.0 & QC3.0

• Input : AC 100-240V

- 1 USB-C PD : DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- 1 USB-A QC : DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**

* 2 USB charging : 5V 1.5A+5V 1.5A **(15W)**

10

65W High Power

T147C2QW2-65W (2PD+1QC+2USB)

5 Ports PD3.0+PPS+QC3.0 and Smart USB

Input AC 100-240V

Single Port Charging Output:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.5 / 15V 2A / 20W 1.5A (30W)
- PPS: 3.3-11V 3A
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- USB-A2+3: Total 5V 2.4A (12W)

2 Ports Charging Output:

- C1+C2 = C1(PD30W)+C2(PD20W)
- C2+A1 = Total 5V 3A (15W)
- C2+A2 = Total 5V 3A (15W)
- A2+A3 = Total 5V 3A (15W)

5 Ports Charging Output:

- Total Power 65W Max



65W High Power

T242C2Q2-65W (2PD+2QC)

65W 4 USB PD 3.0 & QC3.0

Input AC 100-240V

Single Port Charging Output:

- USB-C1/2 PD output : DC 5V 3A / 9V 3A / 12V 3 / 15V 3A / 20V 3.25A (65W)
- USB-A1/2 QC output : DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual Ports Charging Output:

- C1+C2 = C1 (PD 30W) + C2 (PD 30W)
- A1+A2 = Total 5V 3A (15W)

4 Ports Charging Output:

- C1(PD18W)+C2(PD18W)+ A1+A2(Total 5V 3A,15W)



65W High Power

T168C2Q2-65W (2PD+2QC)

65W 4 USB PD 3.0 & QC3.0

Input AC 100-240V

Single Port Charging Output :

- USB-C1/2 PD: DC 5V 3A / 9V 3A / 12V 3 / 15V 3A / 20V 3.25A (65W)
- USB-A1/2 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual Ports Charging Output :

- C1+C2 = C1 (PD 30W) + C2 (PD18W)
- A1+A2 = Total 5V 3A, (15W)

4 Ports Charging Output :

- Total Power 5V 3A(15W) Max



50W High Power

T241QW4-50W (1QC+4USB)

50W 5 USB QC3.0 & Smart USB

Input AC 100-240V

• USB-A1/2 output : Total DC 5V 3.2A (16W)

• USB-A3/4 output : Total DC 5V 3.2A (16W)

• USB-A5 QC output : DC 5V 3A / 9V 2A / 12V 1.5A (18W)

• Total Power 50W Max



65W High Power

Universal with Changeable Plug

US pin charging base with changeable EU,UK and AU plugs

T304-PD65W (1PD)

65W USB-C PD 3.0

Input AC 100-240V

1 USB-C PD Output:

- DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)





15W Magnetic Fast Wireless Charging Pad

WP66T-15W

- Input: DC 9V 2A(18W) or up (Suggested)
- Wireless output : 5W / 7.5W / 10W /15W
- Input port: Built-in USB Type-C Fixed cable



15W Magnetic Fast Wireless Charging Pad

WP12T-15W

- Input: DC 9V 2A (18W) or up (Suggested)
- Wireless output: 5W / 7.5W / 10W /15W
- Input Port: Built-in USB Type-C Fixed cable



15W Magnetic Wireless In-car Charger with Air Vent Clip

WP13T-15W

- Input: DC 9V 2A(18W) or up (Suggested)
- Wireless Output : 5W / 7.5W /10W /15W
- Input Port : USB Type-C female socket

15W

Wireless Charging Pad for iPhone, Airpods, Samsung Galaxy and more

WP39T2-15W

- Input: DC 20W or up (Suggested)
- Input Port: USB Type-C female socket
- 2 Wireless Coil Charging: 5W / 7.5W /10W /15W



15W MagSafe Charger with 10,000mAh MagSafe Power Bank

WP97T-PB10K

- Capacity: 10,000mAh, Li-polymer battery
- USB-C PD Input: DC 5V 2.6A / 9V 2A (18W)
Output : 5V 3A/9V 2.22A/12V 1.67A (20W)
- USB-A QC: DC 4.5V 5A / 5V 4.5A / 9V 2A /12V 1.5A (22.5W)
- USB-C+A Power : Total 5V 3A (15W)
- Wireless output : 5W / 7.5W / 10W /15W



20,000mAh

USB-C PD3.0 and Dual QC 3.0 Portable Power Bank

PB70CQ2-PD20K

- Cell: 20,000mAh Rechargeable Li-Polymer
- 1 Micro USB Input: 5V 2A, 9V 2A
- 1 USB-C Input: 5V 3A /9V 2A /12V 1.5A (18W)
Output: 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 2 USB-A QC: DC 5V 3V / 9V 2A /12V 1.5A (18W)
for each port, Total 18W max
- 3 ports charging: Total PD 18W



10,000mAh

USB-C PD3.0 and Dual QC 3.0 Portable Power Bank

PB70CQ2-PD10K

- Cell: 10,000mAh Rechargeable Li-Polymer
- 1 Micro USB Input : 5V 2A, 9V 2A
- 1 USB-C Input : 5V 3A /9V 2A /12V 1.5A (18W)
Output : 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 2 USB-A QC: DC 5V 3V / 9V 2A /12V 1.5A (18W)
for each port, Total 18W max
- 3 ports charging: Total PD 18W



5000mAh

Portable Power Bank

PB34CU2-5K

- Cell: 5,000mAh Rechargeable Li-Polymer
- 1 Micro USB Input: 5V 2A
- 1 USB-C Input / Output : 5V 2A
- 2 USB-A Output : DC 5V 2.1A for each port, Total 10.5W Max



5W MagSafe Charger with 5000mAh MagSafe Power Bank

WP34T-PB5K

- Cell: 5,000mAh Rechargeable Li-polymer
- Micro USB Input: 5V 2A
- USB-C PD Input / Output: DC 5V 2A
- USB-A Output: DC 5V 2A
- Total Output: 5V 2A (10W)



Front

Back

12

130W

S296C2Q-130W (2PD+1QC)

Dual USB-C PD 3.0+PPS & QC3.0

Input : DC 12-24V

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A **(100W)**
PPS: 3.3-11V 3A, 3.3-21V 5A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A **(30W)**
PPS: 3.3-11V 3A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A **(30W)**

3 Ports Charging

- C1(PD100W)+C2+A1(Total 24W)



60W

S262C3-60W (3PD)

3 USB-C PD3.0

- Input DC 12-24V
- With blue color LED indicator
- 3 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)** For each port
- Total Power : **60W**



48W

S231CQ-48W (1PD+1QC)

USB-C PD3.0+PPS & USB-A QC3.0

- Input DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A **(30W)**
PPS : 3.3V-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**
- Total Power **48W**



48W & 40W

S236C2-45W (2PD)

Dual USB-C PD3.0 +PPS

Input DC 12-24V

- USB-C1 PD Output: DC 5V 3A / 9V 2.77A / 12V 2.08A **(25W)**;
PPS : 3.3-5.9V 3A / 3.3-11V 2.75A
- USB-C2 PD Output: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**;
PPS : 3.3-5.9V 3A / 3.3-11V 2A
- Total Power : **45W**

S236C2-40W (2PD)

Dual USB-C PD3.0 +PPS

- Input DC 12-24V
- USB-C1 PD : DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
- USB-C2 PD : DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
PPS : 3.3-5.9V 3A / 3.3-11V 2A
- Total Power : **40W**



43W

S223CQ-43W (1PD+1QC)

USB-C PD3.0 & USB-A QC3.0

- Input DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 2.77A **(25W)**
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**
- Total Power : **43W**



S236C

S236CQ

38W

S236CQ-38W (1PD+1QC)

USB-C PD3.0+PPS & USB-A QC3.0

- Input DC 12-24V
- 1 USB-C PD output : DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
PPS : 3.3-5.9V 3A / 3.3V-11V 2.75A
- 1 USB-A QC Output : DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**
- Total Power : **38W**



30W, 25W & 20W

S236C-30W (1PD) USB-C PD3.0+PPS

- Input DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A **(30W)**
PPS : 3.6-5.9V 3A / 3.6-11V 2.75A

S236C-25W (1PD) USB-C PD3.0+PPS

- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A **(25W)**
PPS : 3.3-5.9V 3A / 3.3-11V 2.5A

S236C-20W (1PD) USB-C PD3.0+PPS

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
PPS : 3.6-5.9V 3A / 3.6-11V 1.8A

30W, 25W & 20W

S236CQ-30W (1PDC+1QC)

USB-C PD3.0+PPS & USB-A QC3.0

- Input DC 12-24V
- 1 USB-C PD output : DC 5V 3A / 9V 3A / 12V 2.5A **(30W)**
PPS : 3.3-5.9V 3A / 3.3-11V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A **(30W)**
- 2 USB ports : DC 5V 3A (15W)

S236CQ-25W (1PD+1QC)

USB-C PD3.0+PPS & USB-A QC3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A **(25W)**
PPS : 3.3-5.9V 3A / 3.3-11V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**
- 2 USB ports: DC 5V 3A (15W)

S236CQ-20W (1PD+1QC)

USB-C PD3.0+PPS & USB-A QC3.0

- 1 USB-C PD output : DC 5V 3A / 9V 2.22A / 12V 1.67A **(20W)**
PPS : 3.3-5.9V 3A / 3.3-11V 1.8A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A **(18W)**
- 2 USB ports: DC 5V 3A (15W)



DC234-CC4

USB 4 GEN 3 Type-C to Type-C Sync Charge Cable (E-Marker)

- PD3.0 E-marker solution with 20V 5A (100W) power delivery
- 40Gbps data speed at USB4 Gen3 signal (8K@30Hz resolution or dual 4K displays at 60Hz).
- Wide Compatibility: Macbook, iMac, ChromeBook, Nintendo Switch, Notebook and more
- USB Version : USB 4, Gen 3x2 , 40Gbps 5A (100W max)
- 1m cable: 30AWG*8C+34AWG*2C+23AWG*1C+34AWG*4C+2AE2S ; OD 5.0mm



DC141-CC3

USB 3.2 Type-C to Type-C Sync Charge Cable (E-Marker)

- USB Version : USB 3.2 Gen 1x2, 10Gbps 3A (60W max)
- 1m Cable: 1P*32AWG+EAM*4+32AWG*1P+24AWG*1C+32AWG*4C ; OD 4.8mm
- USB Version: USB 3.2 Gen 1x1, 5Gbps 3A (60W max)
- 2m Cable: 30AWG*2C+EAM*4P+32AWG*1P+26AWG*2C +(34AWG*1C+A)*2+34AWG*2C ; OD5.2mm



DC85-CC2-5A

5A Fast Charge USB2.0 Type-C to Type-C Sync-Charge Cable (E-Marker)

- Supports USB Power Delivery up to 100W (20V 5A) E-Marker.
- USB Version : USB 2.0 , 480Mbps 5A (100W max)
- 1m Cable: 22AWG*2C+30AWG*4C, OD: 4.0mm

DC85-CC2

USB2.0 Type-C to Type-C Sync-Charge Cable

- USB Version: USB 2.0, 480Mbps, 3A (60W max)
- 1m Cable: 22AWG*2C+30AWG*3C, OD: 3.5mm



DC64-CC2-5A

5A Fast Charge USB2.0 Type-C to Type-C Sync-Charge Cable (E-Marker)

- Supports USB Power Delivery up to 100W (20V 5A) E-Marker
- USB Version : USB 2.0 , 480Mbps 5A (100W max)
- 1m Cable : 22AWG*2C+28AWG*4C, OD: 6.0mm

DC64-CC2

USB2.0 Type-C to Type-C Sync-Charge Cable

- USB Version : USB 2.0 , 480Mbps, 3A (60W max)
- 1m Cable : 22AWG*2C+28AWG*3C, OD: 6.0mm



Shock-Absorbent Knot to absorb impact on connector when drops onto floor

DC44-CC2

USB2.0 Type-C to Type-C With Shock-Absorbent Knot to absorb impact on connector when drops onto floor

- PVC Jacket with Nylon Braided
- USB Version: USB 2.0 , 480Mbps 3A (60W max)
- 1.5m Cable: 22AWG*2C+26AWG*3C, OD: 3.8mm



DC280-CC2

USB2.0 Type-C to Type-C Sync-Charge Cable

- USB Version : USB 2.0 , 480Mbps, 3A (60W max)
- 1m Cable: 22AWG*2C +28AWG*3C ; OD: 3.8mm

14

DC127-CA3

USB-C 3.2 to USB-A 3.0

- USB Version 3.2 Gen 1x 2, 10Gbps 3A (60W max)
- 1m: 24AWG*2C+30AWG*2P+30AWG*1P+AEB ; OD4.5mm
- USB Version 3.2 Gen 1x1, 5Gbps 3A (60W max)
- 2m: 22AWG*1C+ (30AWG*1P+EAM)*2C+30AWG*1P ; OD4.5mm



DC46-CA2

USB-C 2.0 to USB-A

- USB 2.0, 480Mbps, 2A (Fast Charging)
- Cable Length:
- 1m: 24AWG*2C+30AWG*2C, OD: 3.2mm
- 2m: 22AWG*2C+28AWG*2C, OD: 3.2mm
- Color : White , Black , Red, Gold, Pink, Grey



DC280-CA2

USB-C 2.0 to USB-A

- USB 2.0, 480Mbps, 2A (Fast Charging)
- Cable Length:
- 1m: 23AWG*2C+30AWG*2C, OD: 3.8mm
- 2m: 22AWG*2C+28AWG*2C, OD: 3.8mm



DC85-CA2

USB-C 2.0 to USB-A

- USB 2.0, 480Mbps 2A (Fast Charging)
- 1m: 22AWG*2C+30AWG*2C, OD: 3.5mm



DC44-CA2

USB2.0 Type-C to USB-A

With Shock-Absorbent Knot to absorb impact on connector when drops onto floor

- PVC Jacket with Nylon Braided
- USB Version: USB 2.0 , 480Mbps 2A (Fast Charging)
- 1.5m Cable: 22AWG*2C+26AWG*2C, OD: 3.5mm



Shock-Absorbent Knot to absorb impact on connector when drops onto floor

USB-A to USB-C



DC64-CA2

USB-C 2.0 to USB-A

DC64-MIC

USB-A 2.0 to Micro USB

- Aluminum Connector Case
- USB 2.0, 480Mbps 2A (Fast Charging)
- 1m: 22AWG*2C+28AWG*2C, OD: 6.0mm

USB-A to Micro USB



DC16-CM

USB-C 2.0 to Micro USB

- USB 2.0, 480Mbps 2A
- 1m: 24AWG*2C+28AWG*2C, OD: 3.5mm
- 2m: 22AWG*2C+28AWG*2C, OD: 3.5mm



DC82-CM

USB-C 2.0 to Micro USB

- USB 2.0, 480Mbps 2A
- 1m: 24AWG*2C+28AWG*2C, OD: 3.5mm
- 2m: 22AWG*2C+28AWG*2C, OD: 3.5mm



CAD47-CA2

USB-C Female to USB-A OTG Dongle (Mini design)

- USB 2.0, 480Mbps 2A
- Aluminum Dongle Housing



OTG77-CA3

USB-A Female to USB-C OTG Dongle Adapter

- USB 3.0 (5Gbps 3A)
- Aluminum Dongle Housing



[All makes of cables above can be produced for micro USB data cable]

MFi-DC12-LC2

MFi C94 iC USB-C to Lightning

- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)

1m Cable:

- 23AWG*1C+23AWG*1D+30AWG*3C+AG; OD 3.2mm

2m Cable:

- 22AWG*1C+24AWG*1D +27AWG*2C+32AWG*1C+AB ; OD3.4mm



MFi-PA22-IP7

MFi Lightning to 3.5mm Headphone Converter

Features:

- Lightning connector + 3.5mm Female Headphone Converter
- Using Apple official C101 connector with MFI
- Compatibility to iPhone 14/13/12 / 11 / X series and iPad, iPod
- TPE Cable material
- Aluminum connector casing



MFi-DC33-LC2

MFi C94 iC USB-C to Lightning

- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)

1m Cable:

- 23AWG*1C+23AWG*1D+30AWG*3C+AG; OD 3.4mm

2m Cable:

- 22AWG*1C+24AWG*1D +27AWG*2C+32AWG*1C+AB ; OD3.5mm



MFi-DC12-IP5

MFi C189 iC USB to Lightning

- USB 2.0, 480Mbps, 2.4A
- 0.5m Cable: 22AWG*2C+30AWG*2C, OD 3.2mm
- 1m Cable: 22AWG*2C+30AWG*2C, OD 3.2mm
- 2m Cable: 21AWG*2C+30AWG*2C, OD 3.4mm
- 3m Cable: 18AWG*2C+28AWG*2C, OD 3.8mm



MFi-DC33-IP5

MFi C189 iC USB to Lightning

- USB 2.0, 480Mbps, 2.4A
- 0.5m Cable: 22AWG*2C+30AWG*2C, OD 3.4mm
- 1m Cable: 22AWG*2C+30AWG*2C, OD 3.4mm
- 2m Cable: 21AWG*2C+30AWG*2C, OD 3.6mm
- 3m Cable: 18AWG*2C+28AWG*2C, OD 4.0mm



MFi-P86-IP7

MFi Lightning Earphone for iPhone14/13/12/X series and more

Features:

- Apple C100 connector with MFI approved
- Volume UP / DOWN / PAUSE / PLAY
- Select songs control same as Apple original earphone
- Built-in microphone supports earphone communication
- 10mm Drive unit
- 32Ω Impedance
- 100dB Sensitivity
- 1.2m Cable




MFM-WP72T3

3-in-1 Magsafe Wireless Charging Pad for iPhone, iWatch and AirPods

Features:

- Charges all 3 Apple devices simultaneously.
- 15W for iPhone 14/13/12 series and get MFI certificate
- 5W for AirPods Pro/AirPods 2
- 5W for Apple iWatch 6/SE/5/4/3/2 MFW certified
- C222 IC module for Apple Magsafe Wireless Charger
- C962 IC module for Apple Watch
- Input PD 15V 3A
- Input Port USB Type-C female socket

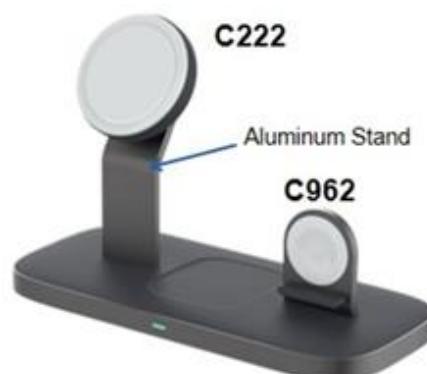

Battery Chargers For Battery-assisted Devices, Equipment and Tools

90W to 900W

Wattage	Output Voltage	Output Current
90W	12V-60V	6A Max
180W	12V-60V	12A Max
240W	12V-60V	14A Max
360W	12V-60V	20A Max
600W	12V-60V	30A Max
900W	12V-90V	60A Max



Chargers for Medical Equipment

3W to 40W



For 10W

Output voltage 5V

Output current: 0.1-2A (step 0.1A)

Output max Power: 10W

Certification: EN60601



For 12W

Output voltage: 5-12V (step 0.1V)

Output current: 0.1-2A (step 0.1A)

Output max Power: 12W

Certification: EN60601



Accessories for E-Scooters

Reflective Stickers



Shoulder Strap



Storage Case



Phone Holder




Accessories for Drones



PD 30W Charger



Neck-strap



Extended Landing Gear



ND Filters 16/64/256



Tempered Glass
Screen Protector



Battery Charging Rack



Propeller with LED



Landing Pad 80x80 and 50x50



Storage Case

Products Trending Now



**Powerhouse for
& Accessories
& Peripherals**
For all makes and designs of
mobile phones and CE devices.

