



2001 Technology Incorporated
Since 1989

Powerhouse for
**& Accessories
& Peripherals**
For all categories of
electronic devices

product²⁰²³trending





Happy to see you again!

After 3 years of absence due to the pandemic we have emerged stronger and more resilient. This year as we celebrate our 34th year since establishment, our vision of the future of this industry has never been clearer and our commitment to the market has never been firmer. Those tasks that we embarked upon to upgrade and expand our operations before the pandemic are now all in full swing.

Our service quality without further elaboration have certainly excelled beyond expectations; and our pledge to delivering products only of the highest quality and safety standards have never been more steadfast.

We take this opportunity to thank you for your continued support even at a time when physical encounter seemed virtually impossible, because in reality we were never away or too far apart.

Thank you.
From our sales team and management



"Out of suffering have emerged the strongest souls; the most massive characters are seared with scars." KHALIL GIBRAN



2001 Technology & Accessories Incorporated
Powerhouse for
Accessories & Peripherals
For all categories of
electronic devices



2001 Technology Incorporated
Since 1989



02

140W GaN

T350C-PD140W

USB PD3.1

Input : AC 100-240V

- USB-C PD: DC DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / 28V 5A (140W)



140W GaN

T356C3Q-140W (3PD+1QC)

USB PD3.1 & QC 3.0

Input : AC 100-240V

Single port charging:

- USB-C1 / C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / 28V 5A (140W) ; PPS: 3.3-16V5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-A1QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual port charging:

- USB-C1+C2: C1(65W) + C2 (65W)
 - USB-C1+C3: C1(100W) + C3 (20W)
 - USB-C1+A1: C1(100W) + A1(18W)
 - USB-C2+C3: C2 (100W) + C3 (20W)
 - USB-C2+A1: C2 (100W) + A1 (18W)
 - USB-C3+A1: Total 5V 3A (15W)
- 4 ports charging :
- C1+C2+C3+A1 output : C1(65W) + C2(45W) + C3+A1(Total 5V 3A, 15W)



100W GaN

T355C3Q-100W (3PD+1QC)

USB PD3.0 & QC3.0

Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (100W)
- PPS: 3.3-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W) PPS:3.3-11V 2.25A
- USB-A1 QC: DC 4.5V 5A / 5V 4.5A/5V 3A/ 9V 2A / 12V 1.5A (22.5W)

Dual port charging:

- USB-C1+C2: C1(65W) + C2 (30W)
- USB-C1+C3: C1(65W)+C3 (22.5W)
- USB-C1+A1: C1(65W)+A1 (22.5W)
- USB-C2+C3: C2 (65W)+C3 (22.5W)
- USB-C2+A1: C2 (65W)+A1(22.5W)
- USB-C3+A1: Total 5V 3A (15W)

4 ports charging :

- C1+C2+C3+A1: C1(45W) + C2 (30W) + C3+A1(Total 5V 3A, 15W)



100W GaN

T338C2Q-100W (2PD+1QC)

USB PD3.0 & QC 3.0

Input : AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (100W)
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (100W)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

3 ports charging:

- UC1+C2+A1 : C1 (45W)+C2 (20W)+A1 (18W)



65W GaN

T201C-PD65W

USB PD3.0

Input : AC 110-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)



65W GaN

T201CW-65W

USB PD3.0 & Samrt USB

Input : AC 100-240V

Single port charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- 1 USB-A Smart: DC 5V 2.4A (12W)

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 (45W)
- 1 USB-A Smart: DC 5V 2.4A (12W)

(Also compatible with T201CQ-65W(PD+QC))



65W GaN

T358CW-65W Mini

USB PD3.0 & Samrt USB

Input : AC 100-240V

Single port charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- 1 USB-A Smart: DC 5V 2.4A (12W)

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 (45W)
- 1 USB-A Smart: DC 5V 2.4A (12W)



65W GaN

T344C-PD65W Mini

USB PD3.0

- Input: AC 100-240V PPS : 5-11V 3A / 5-21V 2A

When Input is AC 100-180V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)

When Input is AC 200-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)



65W GaN

T329C2Q-65W (2PD+1QC)

USB PD3.0 & QC 3.0

- Input: AC 100-240V

Single port charging :

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.25A (27W)
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

3 ports charging :

- USB-C2: DC 5V 3A / 9V 3A / 12V 2.5A / 15 2A / 20V 1.5A (30W)
- USB-C1+A1: Total 5V 3A (15W)



50W**T298C2-50W****Dual USB PD3.0**

Input : AC 100-240V

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A/ 20V 1.5A (30W)
- PPS: DC 3.3-11V 3A ; 3.3-16V 2A
- USB-C2 PD: DC 5V 3A/ 9V 2.22A/ 12V 1.67A (20W)
- Power: **50W**

**45W GaN****T201C-PD45W****USB PD3.0**

Input : AC 110-240V

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A (45W)

**45W GaN****T201CW-45W****USB PD3.0 & Smart USB**

Input : AC 110-240V

Single port charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- 1 USB-A Smart : DC 5V 2.4A (12W)

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A Smart: DC 5V 2.4A (12W)

**45W GaN****T201C2-45W****Dual USB PD3.0**

Input: AC 110-240V

- USB-C1 PD:
DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A (45W)
- USB-C2 PD:
DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A (45W)
- USB-C1+C2:
PD24W+PD24W (5V 3A / 9V 2.5A / 12V 2A /15V 1.5A)

**45W GaN****T344C-PD45W Mini****USB PD3.0**

- Input : AC 110-240V
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A (45W)
- PPS : 5-11V 3A / 5-16V 2.8A

**45W GaN****T175C-PD45W Mini****USB PD3.0**

Input: AC 100-240V

- 1 USB-C PD:
DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 2.25A (45W)
- PPS : 3.3-11V 4.05A / 3.3-16V 3A / 3.3-21V 2.25A

**40W****T201C2-40W****Dual USB PD3.0**

Input : AC 110-240V

- USB Type-C1 PD: DC 5V 3A/ 9V 2.22A /12V 1.67A (20W)
- USB Type-C2 PD: DC 5V 3A/ 9V 2.22A /12V 1.67A (20W)
- Power : **40W**

**38W****T192CQ-38W****USB PD3.0 & QC3.0**

Input : AC 100-240V

- 1 USB-C PD output : DC 5V 3A / 9V 2.22A/12V 1.67A (20W)
- PPS:3.3-11V 2A
- 1 USB-A QC output : DC 5V 3A/ 9V 2A /12V 1.5A (18W)
- Power : **38W**

**35W GaN****T175C2-35W Mini****Dual USB PD3.0**

Input : AC 100-240V

Single port charging:

- USB-C1 PD:
DC 5V 3A / 9V 3A / 12V 2.91A / 15V 2.33A / 20V 1.75A (35W)
- PPS: 3.3-11V 3A
- USB-C2: DC 5V 2A (10W)

2 ports charging:

- USB-C1 PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
- USB-C2 : DC 5V 2A (10W)





32W

T200CW-32W

USB PD3.0 & Smart USB

Input : AC 110-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A Smart: DC 5V 2.4A (12W)

2 ports charging:

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A Smart: DC 5V 2.4A (12W)

30W

T204C-PD30W

USB PD3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- PPS : 3.3-11V 3A ; 3.3-16V 2A



T204CQ-30W

USB PD3.0 & QC3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- PPS : 3.3-11V 3A ; 3.3-16V 2A
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- 2 Ports charging: Total 5V 3A (15W)



30W GaN

T291C-PD30W Mini

USB PD3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)



20W GaN

T166C-PD20W Mini

USB PD3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- PPS: 3V-5.9V 3A / 3.3V-11V 1.8A



T166CQ-20W Mini

USB PD3.0 & QC3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W); PPS: 3V-5.9V 3A / 3.3V-11V 1.8A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports charging: Total 5V 3A max (15W)



25W

T360C-PD25W Mini

USB PD3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V3A / 9V 2.77A / 12V 2.08A (25W)
- PPS: 3.3V-5.9V 3A / 3.3V-11V 2.25A



25W GaN/20W

T290C-PD25W

USB PD3.0

Input: AC 100-240V

- 1 USB Type-C P: DC 5V 3A / 9V 2.77A (25W)
- PPS: 3.3V-5.9V 3A / 3.3V-11V 2.25A

T290C-PD20W

USB PD3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)



T290CQ-25W

USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A (25W)
- PPS: 3.3V-5.9V 3A / 3.3V-11V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A (18W)
- 2 Ports Charging: Total 5V 3A (15W)



T290CQ-20W

USB PD3.0 & QC3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports charging: Total 5V 3A max (15W)

18W QC 3.0

T263Q-18W

Input : AC 100-240V

- 1 USB-A QC 3.0: DC 5V 3A / 9V 2A / 12V 1.5A (18W)



18W QC 3.0

T263Q2-18W

Input : AC 100-240V

- 2 USB-A QC 3.0: DC 5V 3A / 9V 2A / 12V 1.5A (18W) for each port.
- 2 USB charging: Total 5V 3A max (15W)



240W GaN High Power

T353C3Q-240W (3PD+1QC)

4 Ports USB PD3.1 & QC3.0

Input : AC 110-240V

Single Port Charging:

- USB-C1 PD: DC 5V 3A/9V 3A/12V 3A/15V 3A/20V 5A/28V 5A(140W)
- USB-C2/C3 PD: DC 5V 3A/9V 3A/12V 3A/15V 3A/20V 5A(100W) PPS:3.3V-21V/5A
- USB-A1 QC output : DC 4.5V 5A/5V 4.5A/5V 3A/9V 3A/12V 2.5A/15V 2A/20V 1.5A(30W)

2 Ports Charging:

- USB-C1+C2 /C3= C1(140W) + C2/C3(100W)
- USB-C1+A1=C1(140W) + A1(30W)
- USB-C2+C3 : C2(65W) + C3(35W)
- USB-C2/C3+A1: C2/C3 (65W) + A1(30W)

4 Ports Charging :

- USB-C1+C2+C3+A1): C1(140W) + C2(45W) + C3(35W) +A1(18W)



160W GaN

High Power

T340C4W2-160W

(4PD+2USB)

6 Ports USB PD3.0 &

Smart USB

Input : AC 110-240V

Single Port Charging:

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 5A (100W)
PPS: 3.3V-21V5A
- USB-C2/C3/C4 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
C2-PPS 3.3-16V=3A, C3-PPS: 3.3-11V=4.1A;3.3-21V=2.25A,
C4-PPS: 3.3-5.9V=3A;3.3-11V=2.3A
- USB-A1/A2 output : DC 5V 2.4A(12W) for each port

2 Ports Charging:

- USB-C1+C2 = C1(65W) + C(35W)
- USB-C3+C4 = C3(25W) + C(20W)
- USB-A1+A2 = Total 5V 3A (15W) max

6 Ports Charging :

- USB-C1+C2+C3+C4+A1+A2 = C1(65W) + C2 (35W) + C3 (25W) + C4 (20W) + A1+C2(Total 5V 3A,15W)



85W High Power

T311C2Q2-85 (2PD+2QC)

4 Ports USB PD3.0 & QC3.0

• Input AC 100-240V

Single Port Charging Output:

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 3A/ 15V 3A/ 20V 3.25A (65W)
PPS: 3.3-11V 3A
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-A1/2 QC:DC 5V 2.4A / 9V 2A / 12V 1.5A (18W)

2 Ports Charging :

- USB-C1+C2 = C1(65W) + C2 (20W)
- USB-C1+A1 = C1(45W) + A1(18W)
- USB-C2 + A2 = Total 5V 3A, 15W

3 Ports Charging :

- USB-C1+C2+A1 = C1(45W) + C2 (20W) + A1(18W)
- USB-C1+C2+A2 = C1(65W) + C2+A2(Total 5V 3A, 15W)
- USB-C1+A1+A2 = C1(45W) + A1(20W) + A2 (18W)

4 Ports Charging :

- USB-C1+C2+A1+A2= C1(45W) + A1(18W) + C2+A2(Total 5V 3A, 15W)

65W GaN High Power

T168C2Q2-65W (2PD+2QC)

4 Ports USB PD3.0 & QC3.0

Input AC 100-240V

Single Port Charging:

- USB-C1/2 PD: DC 5V 3A / 9V 3A / 12V 3 /15V 3A / 20V 3.25A (65W)
- USB-A1/2 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual Ports Charging:

- C1+C2 = C1 (PD 30W) + C2 (PD18W)
- A1+A2 = Total 5V 3A (15W)

4 Ports Charging:

- Total Power 5V 3A (15W) Max

110W High Power

T223C3Q2-110W (3PD+2QC)

5 Ports USB PD3.0 & QC3.0

Input : AC 100-240V

Single Port Charging:

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 3A (60W)
- USB-C2 PD: DC 5V 3A / 9V 2.7A / 12V 2.1A (25W)
PPS: 3.3-5.9V 3A, 3.3-11V 2.25A
- USB-C3 PD: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- USB-A1 / A2 QC:DC 5V 3A/ 9V 2A/ 12V 1.5 (18W) for each ports

5 Ports Charging:

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 3A (60W)
- USB-C2 / C3 / A1 / A2: Total 50W Max



140W GaN

T356C3Q-140W (3PD+1QC)

USB PD3.1 & QC 3.0

Input: AC 100-240V

Single port charging :

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / **28V 5A (140W)**; PPS: 3.3-16V5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)
PPS: 3.3-11V 2.25A
- USB-A1 QC: DC 5V 3A/ 9V 2A / 12V 1.5A (**18W**)

Dual port charging :

- USB-C1+C2: C1(65W) + C2 (65W)
- USB-C1+C3: C1(100W) + C3(20W)
- USB-C1+A1: C1(100W) + A1(18W)
- USB-C2+C3: C2 (100W) + C3 (20W)
- USB-C2+A1: C2 (100W) + A1(18W)
- USB-C3+A1: Total 5V 3A (15W)

3 ports charging :

- USB-C1+C2+C3: C1(65W) + C2 (45W) + C3 (20W)
- USB-C1+C2+A1: C1(65W) + C2 (45W) + A1(18W)
- USB-C1/C2+C3+A1: C1/C2 (100W) + C3+A1(Total 5V 3A 15W)

4 ports charging :

- C1+C2+C3+A1 output : C1(65W) + C2 (45W) + C3+A1(Total 5V 3A, 15W)



65W GaN

T184C-PD65W

USB PD3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (**65W**)
PPS output: 3.3-21V 3A



65W GaN

T184CQ-65W

USB PD3.0 & QC 3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 3A/ 15V 3A/ 20V 3.25A (**65W**)
PPS : 3.3-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)

2 ports charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- 1 USB-A : DC 5V 2.4A (12W)



45W GaN

T175C-PD45W Mini

USB PD3.0

Input: AC 100-240V

- USB-C PD:
DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (**45W**)
PPS : 3.3-11V 4.05A / 3.3-16V 3A / 3.3-21V 2.25A



100W GaN

T355C3Q-100W (3PD+1QC)

USB PD3.0 & QC 3.0

Input: AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (**100W**)
PPS: 3.3-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)
PPS: 3.3-11V 2.25A
- USB-A1 QC: DC 4.5V 5A / 5V 4.5A/5V 3A/ 9V 2A / 12V 1.5A (**22.5W**)

Dual port charging:

- USB-C1+C2: C1 (65W) + C2 (30W)
- USB-C1+C3: C1(65W) + C3 (22.5W)
- USB-C1+A1: C1(65W) + A1(18W)
- USB-C2+C3: C2 (65W) + C3 (22.5W)
- USB-C2+A1: C2 (65W) + A1(22.5W)
- USB-C3+A1: Total 5V 3A (15W)

3 ports charging:

- USB-C1+C2+C3/A1: C1(45W) + C2 (30W) + C3/A1(22.5W)
- USB-C1/C2+C3+A1: C1/C2 (65W) + C3/A1(Total 5V 3A, 15W)

4 ports charging:

- C1+C2+C3+A1: C1(45W) + C2 (30W) + C3+A1(Total 5V 3A, 15W)



45W

T305C-PD45W

USB PD3.0

Input: AC 100-240V

- USB-C PD:
DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (**45W**)
PPS output : 3.3-5.9V 3A / 3.3-11V 4A



45W

T305CQ-45W

USB PD3.0 & QC 3.0

Input: AC 100-240V

Single port charging:

- USB-C PD : DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (**45W**)
PPS : 3.3-11V 4A
- USB-A QC: DC 5V 2.4A / 9V 3A / 12V 2.25 / 20V 1.5A (**30W**)

2 ports charging :

- 1 USB-C : DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A : DC 5V 2.4A (12W)



45W

T305C2-45W Dual USB PD3.0

Input: AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
PPS: 3.3-16V 3A

2 ports charging:

- USB-C1 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-C2 PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)



40W

T305C2-40W Dual USB PD3.0

Input: AC 100-240V

- USB-C1 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- Power: 40W



35W GaN

T175C2C2-35W Mini Dual USB PD3.0

Input : AC 100-240V

Single port charging :

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.91A / 15V 2.33A / 20V 1.75A (35W); PPS: 3.3-11V 3A
- USB-C2: DC 5V 2A (10W)

2 ports charging:

- USB-C1 PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
- USB-C2 : DC 5V 2A (10W)



35W

T146C2-35W Dual USB PD3.0

Input: AC 100-240V

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W)
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W)
PPS: DC 3.3-11V 3A
- USB-C1+C2: 35W Max



30W

T262CQ-30W USB PD3.0 & QC3.0

Input : AC 100-240V

1 USB-C PD output:

- DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
PPS: 3.3-11V 3A / 3.3-16V 2A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 Ports Charging: Total 5V 3.1A (15.5W)



30W GaN

T233C-PD30W Mini USB PD3.0

Input: AC 100-240V

1 USB-C PD:

- DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
PPS: 3.3-5.9V 3A / 3.3-11V 3A



25W GaN

T290C-PD25W USB PD3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
PPS: 3.3-5.9V 3A / 3.3-11V 2.25A



20W T290C-PD20W

USB PD3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)

25W GaN

T290CQ-25W USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
PPS: 3.3-5.9V 3A / 3.3-11V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3A (15W)



20W T290CQ-20W

USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC output : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : Total 5V 3A (15W)

140W GaN

T350C-PD140W

USB PD3.1

Input : AC 100-240V

- USB-C PD: 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / **28V 5A (140W)**



140W GaN

T356C3Q-140W (3PD+1QC)

USB PD3.1 & QC3.0

Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A/9V3A/12V 3A/15V 3A/20V 5A/**28V 5A (140W)**
- PPS: 3.3-16V5A USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)
- PPS: 3.3-11V 2.25A
- USB-A1 QC: DC 5V 3A/ 9V 2A / 12V 1.5A (**18W**)

Dual ports charging:

- USB-C1+C2: C1(65W) + C2 (65W)
- USB-C1+C3: C1(100W) + C3 (20W)
- USB-C1+A1: C1(100W) + A1(18W)
- USB-C2+C3: C2 (100W) + C3 (20W)
- USB-C2+A1: C2 (100W) + A1(18W)
- USB-C3+A1: Total 5V 3A (15W)

3 ports charging:

- USB-C1+C2+C3: C1(65W) + C2 (45W) + C3 (20W)
- USB-C1+C2+A1: C1(65W) + C2 (45W) + A1(18W)
- USB-C1/C2+C3+A: C1/C2(100W) + C3+A1(Total 5V 3A 15W)

4 ports charging:

- C1+C2+C3+A1: C1(65W) + C2 (45W) + C3+A1(Total 5V 3A, 15W)



100W GaN

T355C3Q-100W (3PD+1QC)

USB PD3.0 & QC3.0

Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (**100W**)
- PPS: 3.3-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**) PPS: 3.3-11V 2.25A
- USB-A1 QC: DC 4.5V 5A / 5V 4.5A/5V 3A/ 9V 2A / 12V 1.5A (**22.5W**)

Dual port charging:

- USB-C1+C2: C1(65W) + C2 (30W)
- USB-C1+C3: C1(65W)+C3 (22.5W)
- USB-C1+A1: C1(65W)+C3 (22.5W)
- USB-C2+C3: C2 (65W)+C3 (22.5W)
- USB-C2+A1: C2 (65W)+A1(22.5W)
- USB-C3+A1: Total 5V 3A (15W)

3 ports charging :

- USB-C1+C2+C3/A1: C1(45W) + C2 (30W) + C3/A1(22.5W)
- USB-C1/C2+C3+A1: C1/C2 (65W) + C3/A1(Total 5V 3A, 15W)

4 ports charging :

- C1+C2+C3+A1: C1(45W) + C2 (30W) + C3+A1(Total 5V 3A, 15W)



65W GaN

T197CQ-65W

USB PD3.0 & QC3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (**65W**) PPS: 3.3-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)

2 ports charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 (45W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)



30W

T118CQ-30W

USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A/12V 2.5A/15V 2A/20V 1.5A (**30W**)
- 1 USB-A QC: DC 5V 3A/ 9V 3A/12V 2.5A/15V 2A/20V 1.5A (**30W**)
- 2 USB ports charging: Total 5V 4A (20W)



30W

T123CQ-30W

USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (**30W**)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)
- 2 USB ports charging: Total 5V 3A (15W)



25W GaN

T290C-PD25W

USB PD3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (**25W**)
- PPS: 3.3-5.9V 3A / 3.3-11V 2.25A



20W T290C-PD20W

USB PD3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)

25W GaN

T290CQ-25W

USB PD 3.0 & QC 3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (**25W**)
- PPS: 3.3-5.9V 3A / 3.3-11V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)
- 2 Ports Charging: Total 5V 3A (15W)



20W T290CQ-20W

USB PD3.0 & QC 3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)
- 2 USB ports charging: Total 5V 3A max (15W)

65W GaN

T213C2Q-65W (2PD+1QC)

USB PD3.0 & QC3.0

Input: AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual port charging :

- USB-C1+C2/A1: C1(45W) + C2A1(18W)
- USB-C2+A1: Total 5V 3A (15W)

3 ports charging:

- C1 (45W)+ C2+A1 (Total 5V 3A ,15W)



65W GaN

T213C2Q-65W (2PD+1QC)

USB PD3.0 & QC3.0

Input: AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual port charging :

- USB-C1+C2/A1: C1(45W) + C2A1(18W)
- USB-C2+A1: Total 5V 3A (15W)

3 ports charging:

- C1 (45W) + C2+A1 (Total 5V 3A ,15W)



45W

T136CQ-45W

USB PD3.0 & QC3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- PPS : 5-11V 3A
- 1 USB-A QC3.0: 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A : 5V 2.4A (12W)

45W

T136CQ-45W

USB PD3.0 & QC3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- PPS 5V-11V 3A
- 1 USB-A QC3.0: 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A : 5V 2.4A (12W)



30W

T123CQ-30W

USB PD3.0 & QC3.0

- Input : AC 100-240V
- 1 USB-C PD : DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A QC : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : 5V 1.5A+5V 1.5A (15W)

30W

T123CQ-30W

USB PD3.0 & QC3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : 5V 1.5A+5V 1.5A (15W)

20W

T290CQ-20W

USB PD3.0 & QC3.0

- Input : AC 100-240V
- 1 USB-C PD : DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : 5V 1.5A+5V 1.5A (15W)



20W

T123CQ-20W

USB PD3.0 & QC3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : 5V 1.5A+5V 1.5A (15W)



160W

S290C2Q-160W (2PD+1QC)

USB PD3.0 & QC3.0

- Input : DC 12-24V

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (100W)
PPS: 3.3-11V 5A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
PPS: 3.3-11V 2A
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 2.5A (30W)

Dual Ports Charging

- USB-C1+C2: C1(100W) + C2 (30W)
- USB-C1+A1: C1(100W) + A1(30W)
- USB-C2+A1: C2 (30W) + A1(30W)

3 Ports Charging

- USB-C1+C2+A1: C1(100W) + C2 (30W)+A1(30W), Power:160W



100W

S245CQ-100W

USB PD3.0 & QC3.0

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
PPS: 3.3-11V 5A
- 1 USB-A QC Output : DC 5V 3A / 9V 2A / 12V 2.92A (35W)
- Materials : Aluminium alloy+PC



85W

S250C2Q-85W (2PD+1QC)

USB PD3.0 & QC3.0

- Input : DC 12-24V

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
PPS: 3.3-11V 5A
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67 (20W)
PPS: 3.3-5.9V 3A / 3.3-11V 1.8A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual Ports Charging

- USB-C1+C2: C1(65W) + C2 (20W)
- USB-C1+A1: C1(65W) + A1(18W)
- USB-C2+A1: Total 5V 3A (15W)

3 Ports Charging

- USB-C1+C2+A1: C1(65W) + C2+A1(Total 15W)



60W

S159C2-60W

USB PD3.0 & QC3.0

- Input : DC 12-24V
- USB-C1 PD: DC 5V 3A/9V 3A /12V 2.5A /15V 2A / 20V 1.5A (30W)
- USB-C2 PD: DC 5V 3A/9V 3A /12V 2.5A /15V 2A / 20V 1.5A (30W)
- PPS: 3.3-11V 3A / 3.3-16V 2A
- 2 USB charging output : 60W



60W

S156C2Q-60W (2PD+1QC)

USB PD3.0 & QC3.0

- Input : DC 12-24V

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 2.8A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
PPS: 3.3-11V 3A
- USB-C2 PD: DC 5V 3A / 9V 2.8A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
PPS: 3.3-11V 3A
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 2.5A (30W)

Dual Port Charging

- USB-C1+C2 PD: C1(30W) + C2 (30W)
- USB-C1+A1: C1(30W) + A1(30W)
- USB-C2+A1: Total 5V 3A (15W)

3 USB charging: C1 (30W) + C2+A1(Total 5V 3A, 15W)

- Materials : Aluminum alloy+PC

45W

S156C2Q-45W (2PD+1QC)

USB PD3.0 & QC3.0

- Input : DC 12-24V

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 2.77A / 12V 2.08 (25W)
PPS:3.3-11V 2.25A
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
PPS :3.3-11V 2A
- USB-A1 QC Output : DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual Port Charging

- USB-C1+C2 PD: C1(25W) + C2 (20W)
- USB-C1+A1: C1(25W) + A1(18W)
- USB-C2+A1: Total 5V 3A (15W)

3 USB charging power :

- C1(25W) + C2+A1(Total 5V 3A, 15W)



45W

S261CQ-45W Mini

USB PD3.0 & QC3.0

- Input : DC 12-24V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A / 20V 1.5A (30W)
- 2 ports charging: Total 5V 4A (20W)

Complete S236 Series

40W

S236C2-40W

Dual USB PD3.0

- Input DC 12-24V
- USB-C1 PD : DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-C2 PD : DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- PPS : 3.3-5.9V 3A / 3.3A-11V 2A
- Total Power : 40W



38W

S236CQ-38W

USB PD3.0 & QC3.0

- Input DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- PPS : 3.3-5.9V 3A / 3.3V-11V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- Total Power : 38W



30W

S236CQ-30W

USB PD3.0 & QC3.0

- Input DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- PPS : 3.3-5.9V 3A / 3.3-11V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- 2 USB ports : DC 5V 3A (15W)

25W

S236CQ-25W

USB PD3.0 & QC3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
- PPS : 3.3-5.9V 3A / 3.3-11V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports: DC 5V 3A (15W)

20W

S236CQ-20W

USB PD3.0 & QC3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- PPS : 3.3-5.9V 3A / 3.3-11V 1.8A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports: DC 5V 3A (15W)

30W

S236C-PD30W

USB PD3.0

- Input DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- PPS : 3.6-5.9V 3A / 3.6-11V 2.75A



25W

S236C-25W

USB PD3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
- PPS : 3.3-5.9V 3A / 3.3-11V 2.5A

20W

S236C-PD20W

USB PD3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- PPS : 3.3-5.9V 3A / 3.3-11V 1.8A

S197 Mini Series

30W

S197CQ-30W Mini

USB PD3.0 & QC3.0

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- PPS: 3.30-11V 3A / 3.3-16V 2A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports charging: DC 5V 3A (15W)



20W

S197C-PD20W Mini

USB PD3.0

- 1 USB-C PD: DC DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)



DC234-CC4-40G (240W)
USB 4 GEN 3 Type-C to Type-C
Sync-Charge Cable(E-marker)

- Supports the latest USB Extended Power Range (EPR) & power delivery up to 240W(48V 5A)
- 40Gbps data speed at USB4, Supports single 8K@60Hz displays or dual 4K@60Hz displays .
- Material: TPE molding
- 1m cable: USB 4, 40Gbps 5A (240W max)
- 2m cable: USB 4, 20Gbps 5A (240W max)



DC175-CC2-5A (100W)
USB 2.0 Type-C to Type-C
Sync-Charge Cable(E-marker)

USB Type-C 2.0 Cable with
Transparent & LCD Digit Display.

- USB 2.0 , 480Mbps 5A (100W max)
- Material: Aluminum with Nylon braided
- 1.2m cable



DC141-CC3 (100W)
USB 3.2 Type-C to Type-C
Sync-Charge Cable(E-marker)

- Material : PVC molding
- 1m Cable: USB 3.2, 10Gbps 5A (100W max)
- 2m cable : USB 3.2, 5Gbps 5A (100W max)



DC54-CC2-5A (100W)
USB 2.0 Type-C to Type-C
Sync-Charge Cable(E-marker)

USB Type-C 2.0 Cable with
Transparent & LCD Digit Display.

- USB 2.0 , 480Mbps 5A (100W max)
- Material: PVC molding with cotton braided
- 1m/1.5m/2m cable



DC116-CC2-240W (240W)
USB 2.0 Type-C to Type-C
Sync-Charge Cable(E-marker)

- USB Version : USB 2.0 , 480Mbps **5A** (240W max)
- Material: Aluminum with Nylon braided
- 1m / 2m Cable



DC280-CC2
USB 2.0 Type-C to Type-C
Sync-Charge Cable

- USB 2.0 , 480Mbps 3A (60W max)
- Material: ABS housing with TPE jacket cable
- 1m Cable



DC64-CC2-5A (100W)
5A Fast Charge
USB 2.0 Type-C to Type-C
Sync-Charge Cable(E-marker)

- Supports USB Power Delivery up to 100W (20V 5A)
- USB 2.0 , 480Mbps 5A (100W max)
- Material: Aluminum housing with TPE jacket
- 1m cable



DC64-CC2-3A
USB2.0 Type-C to Type-C Sync-Charge Cable

- USB Version : USB 2.0 , 480Mbps, 3A (60W max) * 1m cable



DC65-CC2-5A (100W)
USB 2.0 Type-C to Type-C
Sync-Charge Cable(E-marker)
Connector Tip that can Swing 180° Left-Right

- USB Version : USB 2.0 , 480Mbps 5A (100W max)
- Material: Aluminum housing with TPE jacket
- 1m cable

DC65-CC2-3A
USB 2.0 Type-C to Type-C Sync-Charge Cable

- USB Version : USB 2.0 , 480Mbps 3A (60W max)
- 1m cable

DC88-CC2
USB 2.0 Type-C to Type-C
Sync-Charge Cable

- USB 2.0 , 480Mbps 3A (60W max)
- Material: Aluminum with Nylon braided
- 1m /2m Cable



DC58-CC2
USB 2.0 Type-C to Type-C
Sync-Charge Cable

The extra long SR joint makes it a
longer lifetime than ordinary cables

- USB 2.0, 480Mbps 3A (60W max)
- Material: TPE molding with Nylon braided
- 1m / 2m/3m Cable



DC60-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- 90 degree elbow design friendly for gaming user
- Stand function provides perfect view angle for video watching
- USB 2.0 , 480Mbps 3A (60W max)
- Material: Zinc-alloy with Nylon braided
- 1m / 1.8m Cable



DC56-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- The extra long SR joint gives it a longer lifetime than ordinary cables
- USB 2.0 , 480Mbps 3A (60W max)
- Aluminum with Nylon braided
- 1m / 2m / 3m Cable



DC61-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- 180 degree U Turn design for playing games & watching videos while charging.
- Premium zinc-alloy housing of different colors with shiny or matte finishing.
- USB 2.0 , 480Mbps 3A (60W max)
- Zinc alloy with Nylon braided
- 1m / 1.5m Cable



DC127-CA3

USB 3.2 Type-C to USB-A Sync-Charge Cable

- 1m USB 3.2 Gen 1x 2, 10Gbps 3A (60W max)
- 2m USB 3.2 Gen 1x1, 5Gbps 3A (60W max)
- Material : PVC molding



DC90-CA2

USB 2.0 USB-C to USB-A Sync-Charge Cable

- USB 2.0, 480Mbps 2A
- PVC molding with Nylon braided
- 1m Cable



DC16-CM

USB 2.0 USB-C to Micro USB Sync-Charge Cable

- USB 2.0 , 480Mbps 2A
- Material : PVC molding
- 1m / 2m Cable



DC265-K4

4 in 1 Multi Function USB 2.0 Sync-Charge Cable

- USB-A to USB Type-C / Micro USB
- USB-C to USB Type-C / Micro USB
- USB Version : USB 2.0 , 480Mbps 2A
- PVC molding
- 1m Cable



OTG77-AC

USB-A Female to USB-C OTG Dongle Adapter

- USB 3.2 (5Gbps 3A)
- Aluminum Dongle Housing



OTG38-AC

USB-A Female to USB-C OTG Dongle Adapter

- USB 3.2 (5Gbps 3A)
- Aluminum Housing
- 10cm Cable



OTG37-CM

USB-C Female to Micro USB OTG Dongle Adapter

- USB 2.0, 480Mbps 3A
- Aluminum Housing



OTG34-MC

Micro USB Female to USB-C OTG Dongle Adapter

- USB 2.0, 480Mbps 3A
- Aluminum Housing



CAD20-LC

Lightning Female to USB-C Male Adapter

- USB 2.0, 480Mbps 2.4A
- Aluminum Housing



CAD21-LC

Lightning Female to USB-C Male Adapter

- USB 2.0, 480Mbps 2.4 A
- Aluminum Housing



CAD34-LC

Lightning Female to USB-C Male Adapter

- USB 2.0, 480Mbps 2.4 A
- Aluminum Housing





WP13T-15W

Magnetic Wireless In-Car Charger With Air Vent Clip

- Wireless Output : 5W / 7.5W /10W /15W



WP45T3-15WE

3 in 1 Magsafe Charger Desktop Wireless Charger

- Wireless output : 5W / 7.5W / 10W /15W
- 15W** max for mobil ephone
- 5W** wireless charging pad for Airpods
- 2.5W** magnetic wireless charging pad for Apple iWatch



WP86T3-15W

3 in 1 Magsafe Charger Desktop Wireless Charger

- Wireless output : 5W / 7.5W / 10W /15W
- 15W** max for mobil e phone
- 5W** Wireless Charger Pad for Airpods
- 3W** Magnetic Wireless Charger Pad for Apple iWatch



WP94T3-15W

3 in 1 Magsafe Charger Desktop Wireless Charger

- Wireless output : 5W / 7.5W / 10W /15W
- 15W** max for mobil ephone
- 5W** wireless charging pad for Airpods
- 3W** magnetic wireless charging pad for Apple iWatch



10,000mAh

WP92T2-PB10K

2 in 1 MagSafe Power Bank

- Capacity: 10,000mAh, Li-polymer battery
- Wireless output : 5W / 7.5W / 10W /15W
- 15W** max for mobil ephone
- 5W** Wireless Charger Pad for Airpods
- USB Type C: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)
- USB QC3.0: DC 5V 3A / 9V 2 / 12V 1.5A (**18W**)



10,000mAh

WP102T-PB10K

MagSafe Power Bank

- Capacity: 10,000mAh, Li-polymer battery
- Wireless output : 5W / 7.5W / 10W /15W
- USB Type C: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)



stand design

5,000mAh

WP109T-PB5K

MagSafe Power Bank

- Capacity: 5,000mAh, Li-polymer battery
- Wireless output : 5W / 7.5W / 10W /15W
- USB Type C output : DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)



5,000mAh

WP43T-PB5K

MagSafe Power Bank

- Capacity: 5,000mAh, Li-polymer battery
- Wireless output : 5W / 7.5W / 10W
- USB Type C output : DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)



MFi-DC12-LC2**MFi C94 iC USB-C to Lightning**

- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)
- TPE molding
- 1m/2m

**MFi-DC12-IP5****MFi C189 iC USB-A to Lightning**

- USB 2.0, 480Mbps, 2.4A
- PVC molding

**MFi-DC08-LC2****MFi C94 iC USB-C to Lightning**

- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)
- ABS Material
- 1m/2m

**MFi-DC13-IP5****MFi C189 iC USB-A to Lightning**

- USB 2.0, 480Mbps, 2.4A
- TPE molding
- 1m/2m/3m

**MFi-DC33-LC2****MFi C94 iC USB-C to Lightning**

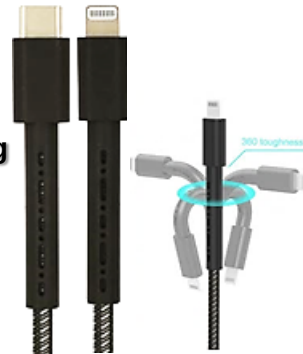
- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)
- Aluminum braided
- 1m/2m

**MFi-DC32-IP5****MFi C189 iC USB-A to Lightning**

- USB 2.0, 480Mbps, 2.4A
- Aluminum+Nylon braided
- 1m/2m

**MFi-DC58-LC2****MFi C94 iC USB-C to Lightning**

- The extra long SR joint provides a longer lifetime than ordinary cables
- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)
- TPE+ Nylon braided
- 1m/2m

**MFi-DC58-IP5****MFi C189 iC USB-A to Lightning**

- The extra long SR joint makes it a longer lifetime than ordinary cables
- USB 2.0, 480Mbps, 2.4A
- TPE+Nylon braided
- 1m/2m

**MFi-DC60-LC2****MFi C94 iC USB-C to Lightning**

- 90 degree elbow design friendly for gaming user
- Stand function provides perfect view angle for video watching
- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)
- Zinc Alloy+braided
- 1m/1.8m

**MFi-DC60-IP5****MFi C189 iC USB-A to Lightning**

- 90 degree elbow design friendly for gaming user
- Standing function provide perfect view angle for video watching
- USB 2.0, 480Mbps, 2.4A
- Zinc Alloy+braided
- 1m/1.8m



Battery Chargers For Battery-operated Devices, Equipment and Tools

84W to 900W

Wattage	Output Voltage	Output Current
90W	12V-60V	6A Max
180W	12V-60V	12A Max
240W	12V-60V	14A Max
360W	12V-60V	20A Max
600W	12V-60V	30A Max
900W	12V-90V	60A Max

BC84W-OK

84W Battery Charger for E-Scooter OKAI 42V 2A Electric Scooter Charger for EA10, ES50B, ES10, ES20, ES520B

BC84W-K3A

84W Battery Charger for E-Scooter

- OCP / OVP / OTP / SCP / RPP / Timing Protection / Cut off Protection
- GX12 (3 pin) connector for MPMAN® TR100, CSSO
- Xiaomi connector for XIAOMI® M365, Pro, Pro 2, SEGWAY® NINEBOT® ES1, ES2, ES3, ES4, MAX G30
- DC Jack (5.5*2.5) connector for CECOTEC® Outsider E-evolution 8.5 Phoenix
- FORCEMOOVE® Suprem 6400 ; GO RIDE® 80 Pro ; ION® "8" Harlow ; OLSSON® Arrow 8.5
- MICRO® Merlin, emicro One, Falcon ; REVOE® Street motion tech 6,5
- SMARTYRO® Xtreme Baggio 10, Xtreme Baggio 8 ; URBAN GLIDE® 100 Pro
- WISPEED® T850, T855, SUV1000, Bird, Lime, Jump, Spin, Lyft, Lime S, Skip



Accessories for E-Scooters



Reflective Stickers

Shoulder Strap



Storage Case



Phone Holder



Lightweight Reflective Safety Vest



Brake Lever Handle Protection Sleeves



LED Light /Bicycle Warning Light



Locks



Helmets





2001 Technology Incorporated
Since 1989

Powerhouse for
**& Accessories
& Peripherals**

For all categories of
electronic devices



Sedex

product²⁰²³trending

