




Powerhouse for
**Accessories
& Peripherals**
For all categories of
electronic devices



Products Trending 2024

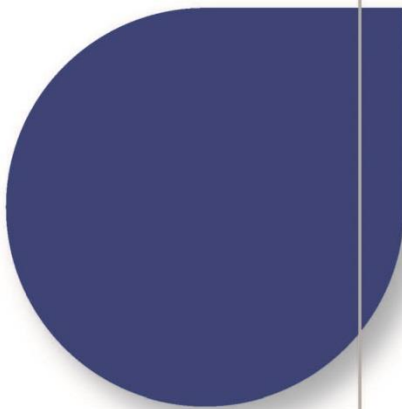



Staying Relevant to Better Serve You

Dear Valued Clients,

Responding to the needs of our business expansion, in 2019 we established a China-registered company.



Dongguan SONEXCO Asia Electronics Technology Co., Ltd. is a wholly-owned, wholly-managed full-fledged China-registered company of Taiwan's 2001 Technology Inc. Established in 2019 for the purpose of relevance; henceforth addressing the needs of our expanded and extensively diversified business activities in recent years that have provided the very platform for a larger scope of product range and the growth of our client base.

We have added another string to our bow to stay relevant and better serve you.

Thank you.



140W GaN

T356C3Q-140W (3C+1A)

USB PD3.1 & QC 3.0

Input : AC 100-240V

Single port charging:

- USB-C1 / C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / 28V 5A (140W) ; PPS: 3.3-16V5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-A1QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual port charging:

- USB-C1+C2: C1(65W) + C2 (65W)
- USB-C1+C3: C1(100W) + C3 (20W)
- USB-C1+A1: C1(100W) + A1(18W)
- USB-C2+C3: C2 (100W) + C3 (20W)
- USB-C2+A1: C2 (100W) + A1 (18W)
- USB-C3+A1: Total 5V 3A (15W)

4 ports charging :

- C1+C2+C3+A1 output : C1(65W) + C2 (45W) + C3+A1(Total 5V 3A, 15W)



65W GaN

T344C-PD65W

USB PD3.0

Input : AC 100-180V

- 1 USB-C PD output : DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W) PPS : 5-11V 3A / 5-21V 2A

Input : AC 200-240V

- 1 USB-C PD output : DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W) PPS : 5-11V 3A / 5-21V 3A



65W GaN

T201CW-65W

USB PD3.0 & Samrt USB

Input : AC 110-240V

Single port charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- 1 USB-A Smart: DC 5V 2.4A (12W)

2 ports charging :

- 1 USB-C PD:



140W GaN

T341C3Q-140W (3C+1A)

USB PD3.1 & QC 3.0

Input: AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / 28V 5A (140W) PPS: 3.3-21V5A
- USB-C3 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W) PPS: 3.3-11V5A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A / 20V 1.5A (30W)

Dual port charging:

- USB-C1+C2/C3: C1 (100W) + C2/C3 (35W)
- USB-C1/C2+A1: C1/C2 (100W) + A1 (30W)
- USB-C2+C3: C2 (100W) + C3 (35W)
- USB-C3+A1: Total 5V 3A (15W)

3 ports charging:

- USB-C1+C2+C3: C1 (65W) + C2 (45W) + C3 (30W)
- USB-C1+C2+A1: C1 (65W) + C2 (45W) + A1 (30W)

4 ports charging:

- C1+C2+C3+A1: C1 (65W) + C2 (45W) + C3+A1 (Total 5V 3A, 15W)



65W GaN

T298CQ-65W

USB PD3.0 & QC3.0

Input : AC 110-240V

Single port charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W) PPS : 3.3-11V 5A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 (45W)
- 1 USB-A : DC 5V 2.4A (12W)



100W GaN

T345C3Q-100W (3C+1A)

USB PD3.0 & QC3.0

Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (100W) PPS: 3.3-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W) PPS: 3.3-11V 3A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A / 20V 1.5A (30W)

Dual port charging:

- USB-C1+C2/C3/A1: C1(65W) + C2/C3/A1 (30W)
- USB-C1+C3/A1: C1(65W)+C3/A1 (30W)
- USB-C3+A1: C3(7.5W)+A1 (7.5W)

3 ports charging :

- USB-C1+C2+C3: C1(45W) + C2 (30W) + C3 (20W)
- USB-C1+C2+A1: C1(45W) + C2 (30W) + A1 (22.5W)
- USB-C1/C2+C3+A1: C1/C2(65W) + C3 (7.5W) + A1 (7.5W)

4 ports charging :

- C1+C2+C3+A1: C1(45W) + C2 (30W) + C3 (7.5W) + A1 (7.5W)



65W GaN

T329C2Q-65W (2PD+1QC)

USB PD3.0 & QC 3.0

• Input: AC 100-240V

Single port charging :

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.25A (27W)
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

3 ports charging :

- USB-C2: DC 5V 3A / 9V 3A / 12V 2.5A / 15 2A / 20V 1.5A (30W)
- USB-C1+A1: Total 5V 3A (15W)



45W GaN

T253CQ-45W

USB PD3.0 & QC3.0

• Input : AC 110-240V

Single port charging :

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 2.25A (45W)
PPS: 3.3-11V 4.05A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A : DC 5V 2A / 9V 1.67A (15W)



50W

T298C2-50W

Dual USB PD3.0

Input : AC 100-240V

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A/ 20V 1.5A (30W)
PPS: DC 3.3-11V 3A ; 3.3-16V 2A
- USB-C2 PD: DC 5V 3A/ 9V 2.22A/ 12V 1.67A (20W)
- Power: 50W



40W

T201C2-40W

USB PD3.0

• Input : AC 110-240V

- USB Type-C1 PD: DC 5V 3A/ 9V 2.22A /12V 1.67A (20W)
- USB Type-C2 PD: DC 5V 3A/ 9V 2.22A /12V 1.67A (20W)
- Power : 40W



45W GaN

T344C-PD45W

USB PD3.0

• Input : AC 110-240V

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
PPS : 5-11V 3A / 5-16V 2.8A



40W GaN

T305C2-40W

Dual USB PD3.0

• Input : AC 100-240V

- USB Type-C1 PD: DC 5V 3A/ 9V 2.22A /12V 1.67A (20W)
- USB Type-C2 PD: DC 5V 3A/ 9V 2.22A /12V 1.67A (20W)
- Power : 40W



45W GaN

T305C2-45W

Dual USB PD3.0

Input : AC 100-240V

Single port charging :

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 2.25A (45W) ;
PPS:3.3-16V 3A
- USB-C2 PD: DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 2.25A (45W) ;
PPS:3.3-16V 3A

2 ports charging :

- USB-C1 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-C2 PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)



35W GaN

T344C-PD35W

USB PD3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W); PPS: 5-11V 3A / 5-16V 2.25A



30W GaN

T344CQ-30W

USB PD3.0 & QC3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A/ 20V 1.5A (30W); PPS: 3.3-11V 3A
- 1 USB-A QC: DC 5V 3A/ 9V 3A/ 12V 2.5A (30W)
- 2 Ports Charging: Total 5V 3A (15W)



35W GaN

T344CQ-35W

USB PD3.0 & QC3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A / 9V 3A/12V 2.92A /15V 2.33A / 20V 1.75A (35W); PPS : 3.3-11V 3A
- 1 USB-A QC: DC 5V 3A/9V 3A / 12V 2.5A (30W)
- 2 Ports Charging: Total 5V 3A (15W)



30W

T204CQ-30W

USB PD3.0 & QC3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A / 20V 1.5A (30W); PPS : 3.3-11V 3A ; 3.3-16V 2A
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- 2 Ports charging: Total 5V 3A (15W)



35W GaN

T216C-PD35W

USB PD3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.92A/ 15V 2.33A/ 20V 1.75A (35W); PPS: 3.3V-11V 3A



30W GaN

T216C-PD30W

USB PD3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A/ 20V 1.5A (30W) PPS: 3.3-11V 3A



35W GaN

T217CQ-35W

USB PD3.0 & QC3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.92A/ 15V 2.33A/ 20V 1.75A (35W); PPS:3.3-11V 3A
- 1 USB-A QC: DC 5V 3A/ 9V 2A/ 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3.6A (18W)



30W GaN

T217CQ-30W

USB PD3.0 & QC3.0

- Input : AC 100-240V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A /15V 2A / 20V 1.5A (30W); PPS:3.3-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3.6A (18W)



25W GaN

T290C-PD25W

USB PD3.0

Input: AC 100-240V

- 1 USB Type-C P: DC 5V 3A / 9V 2.77A (25W)
PPS: 3.3V-5.9V 3A / 3.3V-11V 2.75A



20W

T290C-PD20W

USB PD3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)



25W GaN

T290CQ-25W

USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A (25W)
PPS: 3.3V-5.9V 3A / 3.3V-11V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A (18W)
- 2 Ports Charging: Total 5V 3A (15W)



20W

T286CQ-20W

USB PD3.0 & QC3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports charging: Total 5V 3A max (15W)



25W

T360C-PD25W Mini

USB PD3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V3A / 9V 2.77A / 12V 2.08A (25W)
PPS: 3.3V-5.9V 3A / 3.3V-11V 2.25A



20W

T166C-PD20W Mini

USB PD3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)



20W GaN

T216C-PD20W Mini

USB PD3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)



20W

T166CQ-20W Mini

USB PD3.0 & QC3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 2V 1.67A (20W);
PPS: 3V-5.9V 3A / 3.3V-11V 1.8A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports charging: Total 5V 3A max (15W)



140W GaN

T356C3Q-140W (3C+1A)

USB PD3.1 & QC 3.0

Input: AC 100-240V

Single port charging :

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / 28V 5A (**140W**); PPS: 3.3-16V5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**) PPS:3.3-11V 2.25A
- USB-A1 QC: DC 5V 3A/ 9V 2A / 12V 1.5A (**18W**)

Dual port charging :

- USB-C1+C2: C1(65W) + C2 (**65W**) • USB-C1+C3: C1(100W) + C3 (**20W**)
- USB-C1+A1: C1(100W) + A1(**18W**) • USB-C2+C3: C2 (100W) + C3 (**20W**)
- USB-C2+A1: C2 (100W) + A1(**18W**) • USB-C3+A1: Total 5V 3A (**15W**)

3 ports charging :

- USB-C1+C2+C3: C1(**65W**) + C2 (45W) + C3 (**20W**)
- USB-C1+C2+A1: C1(**65W**) + C2 (45W) + A1(**18W**)
- USB-C1/C2+C3+A1: C1/C2 (**100W**) + C3+A1(Total 5V 3A **15W**)

4 ports charging :

- C1+C2+C3+A1: C1(**65W**) + C2 (45W) + C3+A1(Total 5V 3A, **15W**)



65W GaN

T254C2Q-65W

USB PD3.0 & QC3.0

Input : AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 3A/ 15V 3A/ 20V 3.25A (**65W**) ; PPS:3.3-11V 5A
- USB-C2 PD: DC 5V 3A/ 9V 2.22A/ 12V 1.67A (**20W**)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)

2 ports charging:

- USB-C1+C2: C1(PD45W) + C2 (**15W**)
- USB-C1+A1: C1(PD45W) + A1(**15W**)
- USB-C2+A1: Total 5V 3A (**15W**)

3 ports charging:

- USB-C1+C2+A1: C1(PD45W)+C2+A1(**15W**)



100W GaN

T355C3Q-100W (3C+1A)

USB PD3.0 & QC 3.0

Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (**100W**) PPS:3.3-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**) PPS:3.3-11V 2.25A
- USB-A1 QC: DC 4.5V 5A / 5V 4.5A/5V 3A/ 9V 2A / 12V 1.5A (**22.5W**)

Dual port charging:

- USB-C1+C2: C1 (**65W**) + C2 (**30W**) • USB-C1+C3: C1(**65W**) + C3 (**22.5W**)
- USB-C1+A1: C1(**65W**) + A1(**18W**) • USB-C2+C3/A1: C2 (**65W**) + C3/A1 (**22.5W**)
- USB-C3+A1: Total 5V 3A (**15W**)

3 ports charging:

- USB-C1+C2+C3/A1: C1(**45W**) + C2 (**30W**) + C3/A1(**22.5W**)
- USB-C1/C2+C3+A1: C1/C2 (65W) + C3/A1(Total 5V 3A, **15W**)

4 ports charging:

- C1+C2+C3+A1: C1(**45W**) + C2 (**30W**) + C3+A1(Total 5V 3A, **15W**)



65W GaN

T201CW-65W

USB PD3.0 & Smart IC USB

Input: AC 110-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (**65W**); PPS : 3.3V-21V 3A
- 1 USB-A: DC 5V 2.4A

2 ports charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 (45W); PPS:3.3-16V 3A
- 1 USB-A: DC 5V 2.4A (**12W**)



45W GaN

T201CW-45W

USB PD3.0 & Smart IC USB

Input : AC 110-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (**45W**); PPS:5.9-11 3A
- 1 USB-A: DC 5V 2.4A
- 2 ports charging: C1(**30W**) + A1(5V 2.4A)

65W GaN

T278CQ-65W

USB PD3.0 & QC3.0

Input : AC 100-240V

Single port charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (**65W**) ; PPS:3.3-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 (**45W**); PPS:3.3-16V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)



45W GaN

T201C-PD45W

USB PD3.0

Input : AC 110-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (**45W**); PPS output: 5.9-11V 3A



45W GaN

T253CQ-45W

USB PD3.0 & QC3.0

Input : AC 110-240V

Single port charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W);

PPS: 3.3-11V 4.05A

- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 ports charging :

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)

- 1 USB-A: DC 5V 3A (15W)



45W

T305C2-45W

Dual USB PD3.0

Input: AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)

- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)

PPS: 3.3-16V 3A

2 ports charging:

- USB-C1 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)

- USB-C2 PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)



40W GaN

T226C2-40W

Dual USB PD3.0

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 2.66A / 20V 2A (40W); PPS : 3.6-20V 2A

Dual port charging :

- USB-C /C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)



25W GaN

T290CQ-25W

USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A (25W)

PPS: 3.3-5.9V 3A / 3.3-11V 2.25A

- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

- 2 Ports Charging: Total 5V 3A (15W)



20W T290CQ-20W

USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)

- 1 USB-A QC output : DC 5V 3A / 9V 2A / 12V 1.5A (18W)

- 2 USB charging : Total 5V 3A (15W)

35W GaN

T216C-PD35W USB PD3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.92A/ 15V 2.33A/ 20V 1.75A (35W); PPS : 3.3V-11V 3A



30W GaN T216C-PD30W

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A/ 20V 1.5A (30W); PPS: 3.3-11V 3A

20W GaN T216C-PD20W

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)

35W GaN

T217CQ-35W USB PD3.0 & QC3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.92A/ 15V 2.33A/ 20V 1.75A (35W); PPS:3.3-11V 3A

- 1 USB-A QC: DC 5V 3A/ 9V 2A/ 12V 1.5A (18W)

- 2 Ports Charging: Total 5V 3.6A (18W)



30W GaN T217CQ-30W

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A/ 20V 1.5A (30W) ; PPS:3.3-11V 3A

- 1 USB-A QC: DC 5V 3A/ 9V 2A/ 12V 1.5A (18W)

- 2 Ports Charging: Total 5V 3.6A (18W)

20W GaN T217CQ-20W

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)

- 1 USB-A Q : DC 5V 3A/ 9V 2A/ 12V 1.5A (18W)

- 2 Ports Charging: Total 5V 3.6A (18W)

25W GaN

T290C-PD25W

USB PD3.0

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A (25W)

PPS: 3.3-5.9V 3A / 3.3-11V 2.75A



20W

T290C-PD20W

USB PD3.0

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)

140W GaN

T356C3Q-140W (3C+1A)

USB PD3.1 & QC3.0

Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A/9V3A/12V 3A/15V 3A/20V 5A/ 28V 5A (140W)
- PPS:3.3-16V5AUSB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- PPS:3.3-11V 2.25A
- USB-A1 QC: DC 5V 3A/ 9V 2A / 12V 1.5A (18W)

2 ports charging:

- USB-C1+C2: C1(65W) + C2 (65W)
- USB-C1+C3: C1(100W) + C3 (20W)
- USB-C1+A1: C1(100W) + A1(18W)
- USB-C2+C3: C2 (100W) + C3 (20W)
- USB-C2+A1: C2 (100W) + A1(18W)
- USB-C3+A1: Total 5V 3A (15W)

3 ports charging:

- USB-C1+C2+C3: C1(65W) + C2 (45W) + C3 (20W)
- USB-C1+C2+A1: C1(65W) + C2 (45W) + A1(18W)
- USB-C1/C2+C3+A: C1/C2 (100W) + C3+A1(Total 5V 3A 15W)

4 ports charging:

- C1+C2+C3+A1: C1(65W) + C2 (45W) + C3+A1(Total 5V 3A, 15W)



65W GaN

T196C2-65W

Input : AC 100-240V

Single port charging :

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W) PPS : 3.3-21V 3A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W); PPS : 3.3-21V 3A

2 ports charging :

- USB-C1+C2: C1 (45W) + C2 (20W)



100W GaN

T345C3Q-100W (3C+1A)

USB PD3.0 & QC3.0

Input : AC 100-240V

Single port charging :

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (100W) PPS: 3.3-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W) PPS:3.3-11V 3A
- USB-A1 QC: DC5V 3A / 9V 3A / 12V 2.5A / 20V 1.5A (30W)

Dual port charging:

- USB-C1+C2/C3/A1: C1(65W) +C2/C3/A1 (30W)
- USB-C1+C3/A1: C1(65W)+C3/A1 (30W)
- USB-C3+A1: C3(7.5W)+A1 (7.5W)

3 ports charging :

- USB-C1+C2+C3: C1(45W) +C2 (30W) + C3 (20W)
- USB-C1+C2+A1: C1(45W) +C2 (30W) + A1 (22.5W)
- USB-C1/C2+C3+A1: C1/C2(65W) +C3 (7.5W) + A1 (7.5W)

4 ports charging :

- C1+C2+C3+A1: C1(45W) + C2 (30W) +C3 (7.5W) + A1 (7.5W)



65W GaN

T197CQ-65W

USB PD3.0 & QC3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W); PPS:3.3-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 ports charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25 (45W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)



65W GaN

T196C2Q-65W

Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W) PPS : 3.3-21V 3.25A
- USB-A1 QC : DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 ports charging:

- USB-C1+C2: C1(45W) + C2 (20W)
- USB-C1+A1: C1(45W) + A1(18W)
- USB-C2+A1: Total 5V 3A (15W)

3 ports charging:

- USB-C1+C2+A1: C1(45W) + C2+A1(Total 5V 3A, 15W)



48W GaN

T197CQ-48W

USB PD3.0 & QC3.0

Input : AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W); PPS : 3.3-21V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 ports charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)



45W

T136CQ-45W

USB PD3.0 & QC3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A/20V 2.25A (45W)
PPS 5V-11V 3A
- 1 USB-A QC3.0: 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A/20V 1.5A (30W)
- 1 USB-A : 5V 2.4A (12W)



45W

T136C-PD45W

USB PD3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A/20V 2.25A (45W)
PPS 5V-11V 3A



35W GaN

T177C2-35W

USB PD3.0

Input : AC 100-240V

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W)
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W)
- USB-C1+C2 : 18W+18W (36W)



30W

T123CQ-30W

USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports charging: Total 5V 3A (15W)



25W

T152CQ-25W

USB PD3.0 & QC3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
PPS: 3.3-5.9V 3A / 3.3-11V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3.1A (15.5W)



20W

T198C-PD20W

USB PD3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)



20W

T198C2-20W

USB PD3.0

Input : AC 100-240V

- 2 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 2 Ports Charging: Total 20W



20W

T198CQ-20W

USB PD3.0 & QC3.0

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3A (15W)



65W GaN

T213C2Q-65W

USB PD3.0 & QC3.0

Input: AC 100-240V

Single port charging:

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual port charging :

- USB-C1+C2/A1: C1(45W) + C2A1(18W)
- USB-C2+A1: Total 5V 3A (15W)

3 ports charging:

- C1 (45W)+ C2+A1 (Total 5V 3A ,15W)



65W GaN

T197CQ-65W

USB PD3.0 & QC3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W) PPS:3.3-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports charging: PD45W + QC18W



45W

T136CQ-45W

USB PD3.0 & QC3.0

Input: AC 100-240V

Single port charging:

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 3A / 15V 3A/20V 2.25A (45W) PPS 5V-11V 3A
- 1 USB-A QC3.0: 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual port charging:

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 2.5A /15V 2A/20V 1.5A (30W)
- 1 USB-A : 5V 2.4A (12W)



48W GaN

T197CQ-48W

USB PD3.0 & QC3.0

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W) PPS : 3.3-21V 2.25A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports charging : PD30W+QC18W



30W

T123CQ-30W

USB PD3.0 & QC3.0

• Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A /20V 1.5A (30W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : 5V 1.5A+5V 1.5A (15W)



30W

T123CQ-30W

USB PD3.0 & QC3.0

• Input : AC 100-240V

- 1 USB-C PD : DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- 1 USB-A QC : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : 5V 1.5A+5V 1.5A (15W)



20W

T123CQ-20W

USB PD3.0 & QC3.0

• Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging: 5V 1.5A+5V 1.5A (15W)



20W

T290CQ-20W

USB PD3.0 & QC3.0

• Input : AC 100-240V

- 1 USB-C PD : DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : 5V 1.5A+5V 1.5A (15W)



240W GaN High Power

T353C3Q-240W (3C+1A)

4 Ports USB PD3.1 & QC3.0

Input : AC 110-240V

Single Port Charging:

- USB-C1 PD: DC 5V 3A/9V 3A/12V 3A/15V 3A/20V 5A/28V 5A (140W)
- USB-C2/C3 PD: DC 5V 3A/9V 3A/12V 3A/15V 3A/20V 5A (100W) PPS:3.3V-21V / 5A
- USB-A1 QC: DC 4.5V 5A/5V 4.5A/5V 3A/9V 3A/12V 2.5A/15V 2A/20V 1.5A (30W)

2 Ports Charging:

- USB-C1+C2 /C3= C1(140W) + C2/C3 (100W)
- USB-C1+A1=C1(140W) + A1(30W)
- USB-C2+C3 : C2 (65W) + C3 (35W)
- USB-C2/C3+A1: C2/C3 (65W) + A1(30W)

4 Ports Charging :

- USB-C1+C2+C3+A1: C1(140W) + C2 (45W) + C3 (35W) +A1(18W)



160W GaN

High Power

T340C4W2-160W (4C+2A)

6 Ports USB PD3.0 &

Smart USB

Input : AC 110-240V

Single Port Charging:

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 5A (100W)
PPS: 3.3V-21V5A
- USB-C2/C3/C4 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- C2-PPS 3.3-16V=3A, C3-PPS: 3.3-11V=4.1A;3.3-21V=2.25A,
- C4-PPS: 3.3-5.9V=3A;3.3-11V=2.3A
- USB-A1/A2 output : DC 5V 2.4A (12W) for each port

2 Ports Charging:

- USB-C1+C2 = C1(65W) + C(35W)
- USB-C3+C4 = C3 (25W) + C(20W)
- USB-A1+A2 = Total 5V 3A (15W) max

6 Ports Charging :

- USB-C1+C2+C3+C4+A1+A2 = C1(65W) + C2 (35W) + C3 (25W) + C4 (20W) + A1+C2(Total 5V 3A,15W)



85W High Power

T311C2Q2-85 (2C+2A)

4 Ports USB PD3.0 & QC3.0

• Input AC 100-240V

Single Port Charging Output:

- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 3A/ 15V 3A/ 20W 3.25A (65W)
PPS: 3.3-11V 3A
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-A1/2 QC:DC 5V 2.4A / 9V 2A / 12V 1.5A (18W)

2 Ports Charging :

- USB-C1+C2 = C1(65W) + C2 (20W)
- USB-C1+A1 = C1(45W) + A1(18W)
- USB-C2 + A2 = Total 5V 3A, 15W

3 Ports Charging :

- USB-C1+C2+A1 = C1(45W) + C2 (20W) + A1(18W)
- USB-C1+C2+A2 = C1(65W) + C2+A2(Total 5V 3A, 15W)
- USB-C1+A1+A2 = C1(45W) + A1(20W) + A2 (18W)

4 Ports Charging :

- USB-C1+C2+A1+A2= C1(45W) + A1(18W) + C2+A2(Total 5V 3A, 15W)



100W GaN

High Power

T345C3Q-100W (3C+1A)

4 Ports USB PD3.0 & QC3.0

Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A/9V 3A/12V 3A/15V 3A/20V 5A (100W)
PPS:3.3-20V 5A
- USB-C3 PD: DC 5V 3A/9V 3V/12V 2.5A/15V 2A/20V 1.5A (30W)
PPS:3.3-11V 3A
- USB-A1 QC: DC 5V 3A/9V 3V/12V 2.5A/20V 1.5A (30W)

2 port charging:

- USB-C1+C2:/C3/A1: C1(65W) + C2/C3/A (30W)
- USB-C2+C3/A1: C2 (65W) + C3/A1(30W)
- USB-C3+A1: C3 (7.5W) +A1(7.5W)

3 ports charging:

- USB-C1+C2+C3: C1(45W) + C2 (30W) + C3 (20W)
- USB-C1+C2+A1: C1(45W) + C2 (30W) + A1(22.5W)
- USB-C1/C2+C3+A1: C1/C2 (65W) + C3 (7.5W) + A1(7.5W)

4 ports charging :

- C1+C2+C3+A1: C1(45W) + C2 (30W) + C3 (7.5W) + A1(7.5W)



65W GaN

High Power

T168C2Q2-65W (2C+2A)

4 Ports USB PD3.0 & QC3.0

Input AC 100-240V

Single Port Charging:

- USB-C1/2 PD: DC 5V 3A / 9V 3A / 12V 3 / 15V 3A / 20V 3.25A (65W)
- USB-A1/2 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

Dual Ports Charging:

- C1+C2 = C1 (PD 30W) + C2 (PD18W)
- A1+A2 = Total 5V 3A (15W)

4 Ports Charging:

- Total Power 5V 3A (15W) Max





130W

S209C2Q-130W

USB PD3.0 & QC3.0

- Input : DC 12-24V

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (100W)
PPS: 3.3-11V 3A / 3.3-21V 5A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W) ; PPS: 3.3-11V 3A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)

2 Ports Charging

- USB-C1+C2: C1(100W) + C2 (30W)
- USB-C1+A1: C1(100W) + A1(30W)
- USB-C2+A1: Total 24W Max

3 Ports Charging

- USB-C1+C2+A1: C1(100W) + C2+A1(Total 24W)



130W GaN

S217C2Q-130W

USB PD3.0 & QC3.0

- Input : DC 12-24V

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (100W);
PPS: 3.3-21V 5A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W);
PPS: 3.3-11V 2.75A
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 Ports Charging

- USB-C1+C2 : C1(100W) + C2 (30W)
- USB-C1+A1: C1(100W) + A1(18W)
- USB-C2+A1: Total 5V 3A Max

3 Ports Charging

- USB-C1+C2+A1: C1(100W)
+ C2+A1(Total 24W)



95W

S264C2Q-95W

USB PD3.0 & QC3.0

- Input : DC 12-24V

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W) ;
PPS: 3.3-11V 5A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W) ;
PPS: 3.3-11V 2.75A
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 Ports Charging

- USB-C1+C2: C1(PD65W) + C2 (PD30W)
- USB-C2+A1: Total 5V 3A (15W)

3 Ports Charging

- USB-C1+C2+A1 output: C1(65W) + C2/A1(Total 5V 3A 15W)



95W

S208C2-95W

USB PD3.0

- Input : DC 12-24V

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A /
20V 3.25A (65W) 3.3-11V / 5A, 3.3-21V 3.25A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W) 3.3-11V 3A
- Power : 95W Max



60W

S249C2Q-60W

USB PD3.0 & QC3.0

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W) ; PPS: 3.3-11V 2.75A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W) ; PPS: 3.3-11V 2.75A
- USB-A1QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 Ports Charging

- USB-C1+C2 : C1(PD30W) + C2(PD30W)
- USB-C2+A1: Total 5V 3A (15W)

3 Ports Charging

- USB-C1+C2+A1: C1(30W) + C2/A1(Total 5V 3A 15W)



85W

S250C2Q-85W

USB PD3.0 & QC3.0

- Input : DC 12-24V

Single Port Charging

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
PPS: 3.3-11V 5A
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67 (20W)
PPS: 3.3-5.9V 3A / 3.3-11V 1.8A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

2 Ports Charging

- USB-C1+C2: C1(65W) + C2 (20W)
- USB-C1+A1: C1(65W) + A1(18W)
- USB-C2+A1: Total 5V 3A (15W)

3 Ports Charging

- USB-C1+C2+A1: C1(65W) + C2+A1(Total 15W)



60W

S246CQ-60W

USB PD3.0 & QC3.0

- Input : DC 12-24V

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W); PPS: 3.3-11V 2.75A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- Power : 60W



60W

S246C2-60W

USB PD3.0

- Input : DC 12-24V

- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W) ; PPS: 3.3-11V 2.75A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W) ; PPS: 3.3-11V 2.75A
- Power : 60W



48W**S207CQ-48W****USB PD3.0 & QC3.0**

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
PPS : 3.3-5.9V 3A / 3.3-11V 3A
- 1 USB-A QCOutput : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- Power : 48W

**38W****S207CQ-38W****USB PD3.0 & QC3.0**

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
PPS : 3.3-5.9V 3A / 3.3-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- Power : 38W

**38W****S236CQ-38W****USB PD3.0 & QC3.0**

- Input DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
PPS : 3.3-5.9V 3A / 3.3V-11V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- Total Power : 38W

**30W****S236CQ-30W****USB PD3.0 & QC3.0**

- Input DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
PPS : 3.3-5.9V 3A / 3.3-11V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- 2 USB ports : DC 5V 3A (15W)

25W**S236CQ-25W****USB PD3.0 & QC3.0**

- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
PPS : 3.3-5.9V 3A / 3.3-11V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports: DC 5V 3A (15W)

20W**S201CQ-20W****USB PD3.0 & QC3.0**

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB ports: DC 5V 3A (15W)

**45W****S261CQ-45W Mini****USB PD3.0 & QC3.0**

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A / 20V 1.5A (30W)
- 2 ports charging: Total 5V 4A (20W)

**45W****S236C2-45W****Dual USB PD3.0**

- Input DC 12-24V
- USB-C1 PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W) ;
PPS:3.3-5.9V 3A/3.3-11V 2.75A
- USB-C2 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W) ;
PPS:3.3-5.9V 3A/3.3-11V 2A

**40W****S236C2-40W****Dual USB PD3.0**

- Input DC 12-24V
- USB-C1 PD : DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- USB-C2 PD : DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
PPS : 3.3-5.9V 3A / 3.3A-11V 2A
- Total Power : 40W

30W**S236C-PD30W****USB PD3.0**

- Input DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
PPS : 3.6-5.9V 3A / 3.6-11V 2.75A

**25W****S236C-25W****USB PD3.0**

- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
PPS : 3.3-5.9V 3A / 3.3-11V 2.5A

20W**S201C-PD20W Mini****USB PD3.0**

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)



DC26-CC4-20G (240W)

USB 4 GEN 2 Type-C to Type-C Sync-Charge Cable

Extended Power Range (EPR)

& power delivery up to 240W(48V 5A)

- 20Gbps data speed
- Supports 4K@60Hz audio and video output.
- Housing Material : TPE
- Cable Material : TPE head with fabric braiding
- 1m cable: **USB 4, 20Gbps 5A (240W max)**
- 2m cable: **USB 4, 20Gbps 5A (240W max)**



DC13-CC4-20G (240W)

USB 4 GEN 2 Type-C to Type-C Sync-Charge Cable

Extended Power Range (EPR)

& power delivery up to 240W(48V 5A)

- 20Gbps data speed
- Supports 4K@60Hz audio and video output.
- Housing Material : Food grade silicone
- Cable Material : Food grade silicone jacket
- 1m cable: **USB 4, 20Gbps 5A (240W max)**



DC217-CC3-10G (100W)

USB 3.2 Type-C to Type-C Sync-Charge Cable

- Aluminum Housing
- Nylon braided
- 1m Cable: **USB 3.2, 10Gbps 5A (100W max)**
- 2m cable : **USB 3.2, 10Gbps 5A (100W max)**



DC116-CC2-240W (240W)

USB 2.0 Type-C to Type-C Sync-Charge Cable (E-marker)

- Version: USB 2.0, 480Mbps **5A** (240W max)
- Material: Aluminum with Nylon braided
- 1m / 2m Cable



DC116-CC2-5A (100W)

USB 2.0 Type-C to Type-C Sync-Charge Cable (E-marker)

- Version: USB 2.0, 480Mbps **5A** (100W max)
- Material: Aluminum with Nylon braided
- 1m / 2m Cable



DC54-CC2-5A (100W)

USB 2.0 Type-C to Type-C Sync-Charge Cable (E-marker)

USB Type-C 2.0 Cable with Transparent Housing & LCD Digit Display.


- USB 2.0 , 480Mbps 5A (100W max)
- Material: PVC molding with cotton braided
- 1m/1.5m/2m cable



DC15-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- USB 2.0 , 480Mbps 3A (60W max)
- ABS (Ultra-thin housing)
- Nylon Braided Cable
- 1m /1.5m Cable

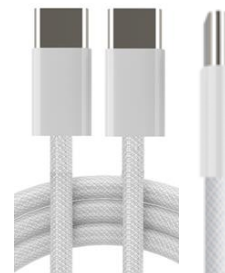

DC123-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- USB 2.0, 480Mbps 3A (60W max)
- ABS (Ultra-thin housing)
- Nylon braided Cable
- 1m Cable

• Available in a wide range of pastel colors



DC82-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- USB 2.0, 480Mbps 3A (60W max)
- Aluminum Housing
- Nylon braided Cable
- 1m /2m Cable



DC138-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- USB 2.0 , 480Mbps 3A (60W max)
- Aluminum Housing
- Net Braided Cable
- 1m /2m Cable



DC191-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- USB 2.0 , 480Mbps 3A (60W max)
- TPE Housing
- Ultra Soft Silicone Cable
- 1m /2m Cable



DC122-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- USB 2.0, 480Mbps 3A (60W max)
- TPE Housing
- Ultra Soft Silicone Cable
- 1m /2m Cable



DC221-CC2

USB 2.0 Type-C to Type-C Sync-Charge Cable

- USB 2.0 , 480Mbps 3A (60W max)
- Aluminum Housing (Metallic Gradient)
- Nylon Braided Cable
- 1m /2m Cable



DC124-CA3

USB 3.2 Type-C to USB-A Sync-Charge Cable

- 1m USB 3.2 Gen 2, 10Gbps 3A (60W max)
- 2m USB 3.2 Gen 2, 10Gbps 3A (60W max)
- TPE Molding Housing
- TPECable



DC125-CA3

USB 3.2 Type-C to USB-A Sync-Charge Cable

- 1m USB 3.2 Gen 2, 10Gbps 3A (60W max)
- 2m USB 3.2 Gen 2, 10Gbps 3A (60W max)
- Aluminum Housing
- Nylon Braided Cable



DC95-CA3

USB 3.2 Type-C to USB-A Sync-Charge Cable

- 1m USB 3.2 Gen 2, 10Gbps 3A (60W max)
- 1.5m USB 3.2 Gen 2, 10Gbps 3A (60W max)
- Aluminum Housing
- Nylon Braided Cable



DC123-CA2

USB 2.0 USB-C to USB-A Sync-Charge Cable

- USB 2.0,480Mbps 2A
- 1m Cable
- ABS Housing
- Nylon braided Cable



DC144-CA2

USB 2.0 USB-C to USB-A Sync-Charge Cable

- USB 2.0,480Mbps 2A
- 1m /2m Cable
- Aluminum+PVC Housing
- PVCCable



OTG77-AC3

USB-A Female to USB-C OTG Dongle Adapter


- USB 3.2 (5Gbps 3A)
- Aluminum Housing



OTG38-AC3

USB-A Female to USB-C OTG Dongle Adapter

- USB 3.2 (5Gbps 3A)
- Aluminum Housing
- 10cm Cable



DC121-CA2

USB 2.0 USB-C to USB-A Sync-Charge Cable

- USB 2.0,480Mbps 2A
- 1m Cable
- ABS Housing
- Ultra Soft Silicone Cable



DC122-CA2

USB 2.0 USB-C to USB-A Sync-Charge Cable

- USB 2.0,480Mbps 2A
- 1m Cable
- TPEHousing
- Ultra Soft Silicone Cable



DC221-CA2

USB 2.0 USB-C to USB-A Sync-Charge Cable

- USB 2.0,480Mbps 2A
- 1m /2m Cable
- Aluminum Housing in gradient color
- Nylon Braided Cable



DC59-CA2

USB 2.0 USB-C to USB-A Sync-Charge Cable

- USB 2.0,480Mbps 2A
- 1m /2m Cable
- Aluminum Housing
- Nylon Braided Cable



DC16-CM

USB 2.0 USB-C to Micro USB Sync-Charge Cable cable

- USB 2.0 , 480Mbps 2A
- PVC Molding
- 1m /2m Cable



PA37-CD

USB Type-C to 3.5mm Audio Cable

- For music and phone call functions
- Built-in Audio IC(DAC IC)
- PVC molding with ABS top cover + PVC cable 14cm



CAD42-LC2

Lightning Female to USB-C Male Adapter

- USB 2.0, 480Mbps PD27W(9V 3A)
- Aluminum Housing



CAD20-CL2

USB-C Female to Lightning Male Adapter

- USB 2.0, 480Mbps 2.4A
- Aluminum Housing



MFI-DC12-LC2

MFI C94 IC

USB-C to Lightning

- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)
- TPE molding
- 1m/2m/3m



MFI-DC12-IP5

MFI C189 IC

USB-A to Lightning

- USB 2.0, 480Mbps, 2.4A
- PVC molding
- 1m/2m/3m



MFI-DC08-LC2

MFI C94 IC

USB-C to Lightning

- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)
- ABS Material
- 1m/2m



MFI-DC08-IP5

MFI C189 IC

USB-A to Lightning

- USB 2.0, 480Mbps, 2.4A
- ABS Material
- 1m/2m/3m



MFI-DC33-LC2

MFI C94 IC

USB-C to Lightning

- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)
- Aluminum braided
- 1m/2m



MFI-DC32-IP5

MFI C189 IC

USB-A to Lightning

- USB 2.0, 480Mbps, 2.4A
- Aluminum+Nylon Braided
- 1m/2m



MFI-DC13-LC2

MFI C94 IC

USB-C to Lightning

- USB 2.0, 480Mbps, 3A (20V 3A, 60W max)
- Silicone Molding Housing
- Silicone Jacket Cable
- 1m/2m



MFI-DC13-IP5

MFI C189 IC

USB-A to Lightning

- USB 2.0, 480Mbps, 2.4A
- Silicone Molding Housing
- Silicone Jacket Cable
- 1m/2m



WP131T-15W2

Qi2 Magsafe Wireless Charger

- qi2 Certified
- Wireless output: **5W / 7.5W / 15W**
- **15W max** For iPhone 13 / 14 / 15 Series
- **7.5W max** For iPhone 12 series and all Qi-enabled phones (**15W max**)
- Input: Built-in Type-C Fixed cable (5V 3A / 9V 2.22A)
- Material: Aluminum Alloy



WP135T-15W2

Qi2 Magsafe Wireless In-Car Charger Mount With Air Vent Clip

- qi2 Certified
- Wireless output: **5W / 7.5W / 15W**
- **15W max** For iPhone 13 / 14 / 15 Series
- **7.5W max** For iPhone 12 series and all Qi-enabled phones (**15W Max**)
- Input: Type-C Port (5V 3A / 9V 2.22A)
- Material: Fiber glass surface Aluminum holder



WP12T-15W2

Qi2 Magsafe Wireless Charger

- qi2 Certified
- Wireless output: **5W / 7.5W / 15W**
- **15W max** For iPhone 13 / 14 / 15 Series
- **7.5W max** For iPhone 12 series and all Qi-enabled phones (**15W Max**)
- Input : Built-in Type-C Fixed cable (5V 2A / 9V 2.22A)
- Top Material: PC; Bottom Material: Aluminium Alloy



WP133T-15W2

Qi2 Magsafe Wireless Charger Pad With Stand

- qi2 Certified
- Wireless output: **5W / 7.5W / 15W**
- **15W max** For iPhone 13 / 14 / 15 Series
- **7.5W max** For iPhone 12 series and all Qi-enabled phones (**15W Max**)
- Input: Type-C Port (5V 3A / 9V 2.22A)
- Material: Aluminum Alloy

Type-C Port for power input
(5V 3A / 9V 2.22A)





WP114T3-15W

3-in-1 Magsafe (Magnetic) Portable Fast Wireless Charger

- Compatible with Qi Standard
- Wireless Output : **5W** / **7.5W** / **10W** / **15W**
- **7.5W** max For iPhone 12-15 Series and all Qi-enabled phones (**15W Max**)
- **5W** For Airpods
- **3W** For Apple iWatch
- Type C Input : 5V 2A / 9V 2A / 9V 3A
- Material: ABS+Rubber Oil



True 15W

WP130T3-15W

Ture 15W 3 in 1 Magsafe (Magnetic) Portable Fast Wireless Charger

- Qi Certified
- Wireless Output : **5W** / **7.5W** / **10W** / **15W**
- **15W** max For iPhone 12-15 Series and all Qi-enabled phones (**15W Max**)
- **5W** For Airpods
- **2.5W** For Apple iWatch
- Type C Input : 5V 2A / 9V 2A / 9V 3A
- Material: ABS



WP123T3-15W

3 in 1 Magsafe (Magnetic) Portable Fast Wireless Charger

- Intelligent Charging Indicator:
 - Charging: Solid white light
 - Standby: Blue light on
 - FOD: Blue light flashing
- Qi Certified
- Wireless Output : **5W** / **7.5W** / **10W** / **15W**
- **7.5W** max For iPhone 12-15 Series and all Qi-enabled phones (**15W Max**)
- **3W** For Airpods
- **2.5W** Wireless Charger Pad for Apple iWatch
- Type C Input : 5V 2A / 9V 2A / 9V 3A
- Material: ABS ; Colors: Black



WP96T3-15W

3 in 1 Magsafe (Magnetic) Portable Fast Wireless Charger

- Compatible with Qi Standard
- Wireless Output : **5W** / **7.5W** / **10W** / **15W**
- **7.5W** max For iPhone 12-15 Series and all Qi-enabled phones (**15W Max**)
- **5W** For Airpods
- **5W** Extra USB C port for Apple watch or other device
- Type C Input : 5V 2A / 9V 2A / 9V 3A
- Material: White color+ silver zinc alloy pole without oil treatment



5,000mAh

WP102T-PB5K

MagSafe Power Bank with Stand

- Capacity: 5,000mAh, Li-polymer battery
- Wireless output : **5W** / **7.5W** / **10W** / **15W**
- USB Type C: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)

10,000mAh

WP102T-PB10K

MagSafe Power Bank with Stand

- Capacity: 10,000mAh, Li-polymer battery
- Wireless output : **5W** / **7.5W** / **10W** / **15W**
- USB Type C: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)

Folded, slim, portable



15W

Desktop Wireless Charger

WP80T-15W

- Wireless Output : **5W / 7.5W / 10W / 15W**
- Compatible with iPhone (**7.5W**), Samsung Galaxy and all Qi-enabled phones (**15W max**)
- Type C Input: 5V 2A / 9V 2A
- Material: PC+ABS with Anti-slide Silicone Surface



3W

Magnetic Wireless Charger For Apple Watch

WP60T-3W

- For Apple Watch 3 to 8 series / SE / Ultra and Apple Watch Future Series
- Type-C Input : 5V 1A
- Output : 3W Max
- Cable : 1m
- Material: Aluminum+ABS



3W

Magnetic Wireless Charger For Apple Watch

WP28T-3W

- The watch can be charged upright
- For Apple Watch 3 to 8 series / SE / Ultra and Apple Watch Future Series
- Type-C Input : 5V 1A
- Output : 3W Max
- Material: ABS+PC



2.5W

Magnetic Wireless Charger For Samsung Watches

For Samsung Phone, Galaxy Watch 6 / 6 Classic / 5 Pro/4/3, Active2/1 and more

WP16T-2.5W

- USB-A Input: 5V 1A
- Output : DC 5V 0.5A (2.5W)
- Materials : ABS
- Cable: 1m (USB-A male)



15W

Wireless Charging Pad for iPhone, AirPods, Samsung Galaxy and more

WP39T2-15W

- Input: DC 20W or up (Suggested)
- Input Port: USB Type-C female socket
- 2 Wireless Coil Charging: **5W / 7.5W / 10W / 15W**

Keychain Style Portable Ultra Thin Wireless Magnetic Power Bank for Apple Watch

- For Apple Watch 3/4/5/6/7/8/SE/Ultra and Apple Watch Future Series

WP36TA-PB1K

- Capacity: 1,000mAh, Li-polymer battery
- Type-C Input : 5V 1A
- Output : 3W Max
- Material: ABS with Rubber paint



Keychain Style Portable Ultra Thin Wireless Magnetic Power Bank for Samsung Watch

- For Samsung Phone, Galaxy Watch Charger 6/6 Classic / 5 Pro/4/3, Active2/1 and more

WP36TS-PB1K

- Capacity: 1,000mAh, Li-polymer battery
- Type-C Input: 5V 1A
- Output: 3W Max
- Material: ABS with Rubber paint



Battery Chargers for E-Scooters



BC84W-OK

**84W Battery Charger for OKAI 42V 2A Electric Scooter
Models EA10, ES50B, ES10, ES20, ES520B.**

- OCP / OVP / OTP / SCP / RPP/ Timing Protection / Cut off Protection
- AC Input Voltage Range: AC90V~AC264V
- Output Voltage: 42V
- Output Current: 2A
- Output Power: 84W Max
- AC Cable: EU plug, 1.2 m
- DC Cable: 2m



BC84W-K3A

84W Battery Charger for Other Models of E-Scooters

- OCP / OVP / OTP / SCP / RPP/ Timing Protection / Cut off Protection

Power for the following E-Scooter Models

- GX12 (3 pin) connector for MPMAN® TR100, CSSO
- Xiaomi connector for XIAOMI® M365, Pro, Pro 2, SEGWAY® NINEBOT® ES1, ES2, ES3, ES4, MAX G30
- DC Jack (5.5*2.5) connector for CECOTEC® Outsider E-volution 8.5 Phoenix
- FORCEMOOVE® Supreme 6400; GO RIDE® 80 Pro; ION® "8" Harlow ; OLSSON® Arrow 8.5
- MICRO® Merlin, Emicro One, Falcon; REVOE® Street motion tech 6,5
- SMARTYRO® Xtreme Baggio 10, Xtreme Baggio 8 ; URBAN GLIDE® 100 Pro
- WISPEED® T850, T855, SUV1000, Bird, Lime, Jump, Spin, Lyft, Lime S, Skip
- AC Input Voltage Range: AC90V~AC264V
- Output Voltage: 42V
- Output Current: 2A Max
- AC Cable: EU plug, 1.5m
- DC Cable: 2m



We can also supply

84W to 900W Battery Chargers

For battery-operated devices, equipment and tools





100W GaN GRS

T345C3Q-100W (3C+1A)

USB PD3.0 & QC3.0 Multi Ports High Power

Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (**100W**) PPS: 3.3-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (**30W**) PPS: 3.3-11V 3A
- USB-A1 QC: DC5V 3A / 9V 3A / 12V 2.5A / 20V 1.5A (**30W**)

4 ports charging :

- C1+C2+C3+A1: C1(**45W**) + C2 (**30W**) + C3 (**7.5W**) + A1 (**7.5W**)



65W GaN GRS

T367C2Q-65W (2C+1A)

USB PD3.0 & QC 3.0

Input: AC100-240V

Output:

- USB-C 1&2: 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V / 3.25A (**65W Max**)
- PPS 3.3 - 11V / 3A / 3.3 - 21V / 3A
- USB-A: 5V3A / 9V / 3A / 12.0V / 3A / 20V 2.25A (**45W Max**)
- USB-C1 + USB-C2/A1: **45W+20W**
- USB-C2 + USB-A: **15W**
- USB-C2 + USB-C1 + USB-A: **45W+15W**
- Material : **Recycled PC**



65W GaN GRS

T401C2Q-65W (2C+1A)

USB PD3.0 & QC 3.0

Input: AC100-240V

Output:

- USB-C 1 & 2: 5V3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (**65W Max**)
- PPS: 3.3 – 11V 3A / 3.3 - 21V 3A
- USB-A: 5V 3A / 9V 3A / 12V 3A / 20V / 2.25A (**45W Max**)
- USB-C1 + USB-C2/A1: **45W+20W**
- USB-C2 + USB-A: **15W**
- USB-C1 + USB-C2 + USB-A: **45W+15W**
- Material: **Recycled PC**



45W GaN GRS

T401CQ-45W

USB PD3.0 & QC 3.0

Input: AC100-240V

Output:

- USB-C: 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (**45W Max**)
- PPS 3.3-11V 3A / 3.3 - 21V 2.15A
- USB-A: 5V 3A / 9V 3A / 12V 3A (**36W Max**)
- USB-C + USB-A: **15W**
- Material: **Recycled PC**



20W GaN GRS

T401C-PD20W

USB PD3.0

Input: AC 100-240V

Output:

- USB-C PD3.0: 5V 3A / 9V 2.22 / 12V / 1.67A (**20W Max**)
- PPS 3.3-5.9 V 3A / 3.3 - 11V 1.8A
- Material: **Recycled PC**



30W GaN GRS

T401CQ-30W

USB PD3.0 & QC 3.0

Input: AC100-240V

Output:

- USB-C: 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (**30W Max**)
- PPS 3.3-11V 3A / 3.3 - 16V 2A
- USB-A: 5V 3A / 9V 3A / 12V 2.5A (**30WMax**)
- USB-C & USB-A: 5V 3A, 15W Max
- Material: **Recycled PC**



188W GaN GRS

USB Desktop Charger Multiport Charger

T346C3Q2-188W

3 USB PD3.0+PPS Compatible Super Fast Charging

2 USB QC3.0 and Auto detection

•Input : AC 100-240V

Single port charging :

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / 28V 5A (140W) PPS: 3.3V-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W) PPS: 3.3-11V 3A / 3.3-16V 2A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A / 20V 1.5A (18W)
- USB-A2 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)

5 ports charging:

- USB-C1+C2+C3+A1+A2:C1(100W) + C2(45W) + C3+A1(15W) + A2 (18W)
- Materials: 100% GRS, Recycled PC (Contains 100% GRS material in the shell)



38W GRS

S298CQ-38W

USB PD3.0 & QC 3.0

Input: DC12-24V

Output:

- USB-C: 5V 3A / 9V 2.22A / 12V 1.67A (PD20W Max)
PPS 3.3 - 5.9V 3A / 3.3 - 11V 2.0A
- USB-A: 5V 3A / 9V 2A / 12.0V 1.5A (QC18W Max)
- USB-C + USB-A: PD20W + QC18W
- Size: 63*24*24mm
- Material: Recycled Aluminum alloy & Recycled PC



25W GRS

S298C-PD25W

USB PD3.0

Input: DC12-24V

Output: 5V 3A / 9V 2.77A / 12V 2A / 12V 2.08A

PPS: 3.6 - 5.9V 3A / 3.6 - 11V 2.25A

- Size: 63*24*24mm
- Material: Recycled Aluminum Alloy & Recycled PC



GRS

DC156-CC2

USB3.2 60W

Sync-Charge Cable

USB-C to USB-C

- Charging Current: 3A
- Cable Length: 1m
- Material: Recycled TPE



GRS

DC157-CC2

USB3.2 60W

Sync-Charge Cable

USB-C to USB-C

- Charging Current: 3A
- Cable Length: 1m
- Material:

Recycled Aluminum alloy &
Recycled TPE & Recycled PET



GRS

PB13CU-PB5K 5000mAh

Portable Power Bank

- Battery Type: Li-ion polymer
- Battery capacity: 5000mAh/18.5Wh
- USB-C Input: 5V 2.4A
- Micro Input USB 5V 2A
- USB-C Output: 5V 2.4A
- USB-A Output: 5V 2.4A
- USB-A & USB-C Output: 5V 2.4A
- Size: 64*15*103(mm)
- Material: Recycled Aluminum alloy & Recycled ABS



In-car Charger Extension Hub

135W S265C4Q2-135W (4C+2A)

USB PD3.0 & QC 3.0

- Material: ABS+PC
- Input voltage: DC 12V~24V/12A
- Blue LED display: Voltage warning flash-display under 10.5+/-0.4V
- Cable length: 1.5 meter

Cigarette Lighter Plug for Front Seat (Total 85W)

- USB-C1 PD 65W output : 5V-15V / 3A, 20V / 3.25A, PPS3.3-11V / 5A
- USB-C2 PD 20W output : 5V 3A / 9V 2.22A /12V 1.67A
- USB-A1 QC 18W output : 5V 3A / 9V 2A / 12V 1.5A
- USB-C2+A1 total shared : 5V 3A

Extension for Rear Seats (Total output: 50W)

- USB-C3 PD 30W output : 5V 3A / 9V 3A /12V 2.5A, PPS3.3-11V / 3A
- USB-C4 PD 20W output : 5V 3A / 9V 2.22A /12V 1.67A
- USB-A2 QC 18W output : 5V 3A / 9V 2A / 12V 1.5A
- USB-C4+A2 total shared: 5V 3A

6 ports charging:

- USB-C1+C2+C3+C4+A1+A2 output : C1 (65W) + C2+A1(15W) + C3 (30W) + C4+A2 (15W)



100W S265C4Q2-100W (4C+2A)

USB PD3.0 & QC 3.0

- Material: ABS+PC
- Input voltage: DC 12V~24V/12A
- Blue LED display: Voltage warning flash-display under 10.5+/-0.4V
- Cable length: 1.5 meter

Cigarette Lighter Plug for Front Seat (Total 50W)

- USB-C1 PD 30W output : 5V 3A / 9V 3A / 12V 2.5A, PPS3.3-11V/3A
- USB-C2 PD 20W output : 5V 3A / 9V 2.22A / 12V 1.67A
- USB-A1 QC 18W output : 5V 3A / 9V 2A /12V 1.5A
- USB-C1+C2 total shared: 5V 3A

Extension for Rear Seats (Total output: 50W)

- USB-C3 PD 30W output : 5V 3A / 9V 3A /12V 2.5A PPS3.3-11V / 3A
- USB-C4 PD 20W output : 5V 3A / 9V2.22A /12V 1.67A
- USB-A2 QC 18W output : 5V 3A / 9V 2A / 12V 1.5A
- USB-C4+A2 total shared: 5V 3A

6 ports charging:

- USB-C1+C2+C3+C4+A1+A2 output : C1(30W) + C2+A1 (Total 15W)+C3 (30W) + C4+A2 (Total 15W)



98W S266C3Q2-98W (3C+2A)

USB PD3.0 & QC 3.0

Cigarette Lighter Plug for Front Seat (Total 48W)

- USB-C1 PD 30W output : 5V 3A / 9V 3A / 12V 2.5A / PPS3.3-11V / 3A
- USB-A1 QC 18W output : 5V 3A / 9V 2A /12V 1.5A

Extension for Rear Seats (Total 50W)

- USB-C2 PD 30W output : 5V 3A / 9V 3A /12V 2.5A /PPS3.3-11V / 3A
- USB-C3 PD 20W output : 5V 3A / 9V 2.22A /12V 1.67A
- USB-A2 QC 18W output : 5V 3A / 9V 2A /12V 1.5A
- USB-C3+A2 total shared: 5V 3A

5 ports charging:

- USB-C1+C2+C3+A1+A2 output : C1(48W)+A1(18W)+C2 (30W)+C3+A2 (Total15W)



Products Trending 2024



2001 Technology Incorporated
Since 1989
Powerhouse for
**Accessories
& Peripherals**
For all categories of
electronic devices



**Dongguan SONEXCO Asia
Electronics Technology Co., Ltd.**
Subsidiary of 2001 Technology Inc.

