

Products Trending 2025



2001
2001 Technology Incorporated
Since 1989

Powerhouse for
**Accessories
& Peripherals**
For all categories of
electronic devices

October 2024

Staying Relevant to Better Serve You

Dear Valued Clients,
Responding to the needs of our business expansion, in 2019 we established a China-registered company.



Dongguan SONEXCO Asia Electronics Technology Co., Ltd. is a wholly-owned, wholly-managed full-fledged China-registered company of Taiwan's 2001 Technology Inc. Established in 2019 for the purpose of relevance; henceforth addressing the needs of our expanded and extensively diversified business activities in recent years that have provided the very platform for a larger scope of product range and the growth of our client base.

We have added another string to our bow to stay relevant and better serve you.

Thank you.




2001 Technology Incorporated
Since 1989

Powerhouse for
Accessories & Peripherals

For all categories of
electronic devices






140W GaN

T356C3Q-140W (3C+1A)


- Input : AC 100-240V
- USB-C1 / C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / 28V 5A (**140W**) ; PPS: 3.3-21V5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)
- USB-A1QC: DC 5V 3A/ 9V 2A / 12V 1.5A (**18W**)
- C1+C2+C3+A1 output : C1(**65W**) + C2 (**45W**) + C3+A1(Total 5V 3A, **15W**)



100W GaN

T255C2Q-100W (2C+1A)


- Input : AC 110-240V
- USB-C1 / C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / (**100W**); PPS: PPS:3.3-20V 5A
 - USB-A1QC: DC 5V 3A/ 9V 2A / 12V 2.5A / 20V 1.5A (**30W**)
 - C1+C2+A1: C1 (**65W**) + C2 (12W)+A1(12W)



100W GaN

T355C3Q-100W (3C+1A)

- Input : AC 100-240V
- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (**100W**) PPS:3.3-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (**20W**)
- USB-A1 QC: DC 4.5V 5A / 5V 4.5A/5V 3A/ 9V 2A / 12V 1.5A (**22.5W**)
- C1+C2+C3+A1: C1(45W) + C2(30W) + C3+A1(Total 5V 3A, **15W**)



100W GaN

T376C2Q-100W (2C+1A)

- Input : AC 100-240V
- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (**100W**) PPS:3.3-21V 4.75A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.25A (**27W**)
- C1+C2+A1 output : C1(65W) + C2/A1(Total **24W**)



65W GaN

T347C2Q-65W (2C+1A) AU

- Input : AC 100-240V
- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W); PPS: 5-21V 3A
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- USB-C1+C2: Total 5V 3A (15W)
- USB-C1+C2+A1: Total 5V 3A (15W)

T347CQ-65W (1C+1A) EU / UK / AU


- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W); PPS: 5-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB: Total 5V 3A (15W)

T347C-65W (1C) EU / UK / AU

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W); PPS: 5-21V 3A



Available in these
ports configuration



65W GaN

T201CW-65W

- Input : AC 110-240V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
PPS 3.3V -21A 3A
- 1 USB-A Smart: DC 5V 2.4A (12W)
- PD+QC : PD(45W) + USB-A (12W)

T201C-65W

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)



T254C2Q-65W (EU)

T179C2Q-65W (US)



65W GaN

T254C2Q-65W (EU) / T179C2Q-65W (US)

- Input : AC 100-240V
- USB-C1 PD: DC 5V 3A/ 9V 3A/ 12V 3A/ 15V 3A/
20V 3.25A (65W) PPS:3.3-11V 5A
- USB-C2 PD: DC 5V 3A/ 9V 2.22A/ 12V 1.67A (20W)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- USB-C1+C2+A1: C1(PD45W)+C2+A1(15W)

65W GaN

T358CQ-65W

Input : AC 110-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W)
PPS: 5-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- USB-C+USB-A: USB-C PD(45W)+USB-A (12W)



65W GaN

T197CQ-65W (1C+1A)

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W); PPS:3.3-21V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- PD+QC : PD(45W)+QC(18W)



65W GaN

T344C-65W

When Input is AC100-180V

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W) PPS : 5-11V 3A / 5-21V 2A

When Input is AC200-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (65W) PPS : 5-11V 3A / 5-21V 3A



65W GaN

T253C-65W (1C)

Input : AC 110-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 3A/ 15V 3A/ 20V 3.25A (65W) PPS: 3.3-11V 5A



45W GaN

T344C-45W

Input : AC 110-240V



- 1 USB-C PD output : DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W) PPS : 5-11V 3A / 5-16V 2.8A



45W GaN

T253CQ-45W (1C+1A)

- 1 USB-C PD output : DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 2.25A (45W) PPS: 3.3-11V 4.05A
- 1 USB-A QC output : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- PD+QC: PD(30W)+QC(15W)



T253C2-45W (2C)

- USB-C1/C2 PD output : DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 2.25A (45W) PPS: 3.3-11V 4.05A
- C1+C2: C1(25W)+C2(20W)

45W GaN

T196C2-45W (2C)

Input: AC 100-240V

- USB-C1/C2PD : DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W) PPS : 3.3-11V 3A / 3.3-20V 2.25A
- 2 USB charging: 25W+20W / 35W+10W, (45W Max)



45W GaN

T305CQ-45W (1C+1A)

Input: AC 100-240V


- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W) PPS : 3.3-11V 4A
- 1 USB-A QC: DC 5V 2.4A / 9V 3A / 12V 2.25A / 20V 1.5A(30W)
- 2 USB charging: PD(30W) + USB-A (12W)



T305C2-45W (2C)

Input: AC 100-240V

- USB-C1 /C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W) PPS : 3.3-16V 3A
- 2 USB charging : C1(20W) + C2 (25W)



35W GaN

T348C-35W (1C)

Input : AC 100-240V

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W) PPS 3.3-5.9V 3A/3.3-11V 3.18A

T348C2-35W (2C)

Input : AC 100-240V

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W) PPS: 3.3-11V 3A / 3.3-16V 2A

Dual port charging :

- USB-C1 /C2 : Total 5V 3A (15W)

30W GaN

T348C-30W (1C)

T348CQ-30W (1C+1A)

25W GaN

T348C-25W (1C)

T348CQ-25W (1C+1A)

20W GaN

T348C-20W (1C)

T348CQ-20W (1C+1A)

35W GaN

T349C-35W (1C)

Input : AC 100-240V

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W) PPS 3.3-5.9V 3A/3.3-11V 3.18A

T349CQ-35W (1C+1A)

Input : AC 100-240V

- USB-C PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W) PPS: 3.3-11V 3A / 3.3-16V 2A
- USB-A QC output : DC 5V 3A/9V 3A/ 12V 2.5A (30W)

Dual port charging :

- USB-C+A : Total 5V 3.1A (15.5W)

30W GaN

T349C-30W (1C)

T349CQ-30W (1C+1A)

25W GaN


T349C-25W (1C)

T349CQ-25W (1C+1A)

20W GaN

T349C-20W (1C)

T349CQ-20W (1C+1A)



35W GaN

T216C-35W (1C)

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.92A/ 15V 2.33A/ 20V 1.75A (**35W**) PPS : 3.3V-11V 3A

T217CQ-35W (1C+1A)

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.92A/ 15V 2.33A/ 20V 1.75A (**35W**) PPS:3.3-11V 3A
- 1 USB-A QC : DC 5V 3A/ 9V 2A/ 12V 1.5A (**18W**)
- 2 Ports Charging: Total 5V 3.6A (**18W**)

30W GaN

T216C-30W (1C)

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A/ 20V 1.5A (**30W**); PPS:3.3-11V 3A

T217CQ-30W (1C+1A)

- 1 USB-C PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/ 15V 2A/ 20V 1.5A (**30W**); PPS:3.3-11V 3A
- 1 USB-A QC: DC 5V 3A/ 9V 2A/ 12V 1.5A (**18W**)
- 2 Ports Charging: Total 5V 3.6A (**18W**)

25W GaN

T216C-25W (1C)

T217CQ-25W (1C+1A)

20W GaN

T216C-20W (1C)

T217CQ-20W (1C+1A)

35W GaN

T182CQ-35W (1C+1A)

Input : AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.92A / 15V 2.33A / 20V 1.75A (35W) PPS:3.3-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging: 5V 4A (20W) Max




35W GaN

T344CQ-35W (1C+1A)

Input : AC 110-240V

- 1 USB-C PD: DC 5V 3A/9V 3A/12V 2.92A/15V 2.33A/20V 1.75A (35W); PPS:5-11V 3A / 5-16V 2.25A
- 1 USB-A QC: DC 5V 3A/9V 2A/12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3A (15W)



30W GaN

T377C2-30W (2C)

Input : AC 100-240V

- USB-C1+C2 PD output :DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W) PPS: 5-11V 3A
- 2 USB charging output : Total 5V 3.6A (18W) max



30W GaN

T263C-30W (1C)

Input : AC 100-240V

- DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- PPS: 3.3-5.9V / 3.3-11V 3A

T263CQ-30W (1C+1A)

Input : AC 100-240V

- DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W)
- PPS: 3.3-5.9V / 3.3-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3.1A (15.5W)





30W

T198C-30W (1C)

Input : AC 100-240V

- DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W) PPS: 3.3-11V 3A

T198CQ-30W (1C+1A)

Input : AC 100-240V

- DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W) PPS: 3.3-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 4A (20W)



Available in these
ports configuration

20W

T198C-20W (1C)

Input : AC 100-240V


- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)

T198C2-20W (2C)

- 2 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 2 Ports Charging: Total 20W

T198CQ-20W (1C+1A)

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3A (15W)



25W GaN

T290C-25W (1C)

Input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A (25W) PPS: 3.3-5.9V 3A / 3.3-11V 2.75A

T290CQ-25W (1C+1A)

input: AC 100-240V

- 1 USB Type-C PD: DC 5V 3A / 9V 2.77A (25W) PPS: 3.3-5.9V 3A / 3.3-11V 2.75A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 Ports Charging: Total 5V 3A (15W)

20W GaN

T290C-20W (1C)

input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)

T290CQ-20W (1C+1A)

Input: AC 100-240V

- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
- 1 USB-A QC output : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- 2 USB charging : Total 5V 3A (15W)

240W GaN T381C4-240W (4C)

- Input : AC 100-240V
- USB-C1 / C2 / C3 / C4 PD: DC 5V 3A/9V 3A/12V 3A/15V 3A/20V 5A/28V 5A (140W)
PPS:3.3V-21V/5A
- USB-C1+C2+C3+C4 output : C1+C2(140W) + C3+C4(100W)



160W GaN T340C4W2-160W (4C+2A)

- Input : AC 110-240V
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A/15V 3A / 20V 5A (100W); PPS: 3.3V-21V5A
- USB-C2/C3/C4 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- C2-PPS 3.3-16V 3A, C3-PPS: 3.3-11V 4.1A; 3.3-21V 2.25A,
- C4-PPS:3.3-11V 3A
- USB-A1/A2: DC 5V 2.4A (12W) for each port
- USB-C1+C2+C3+C4+A1+A2 = C1(65W) + C2 (35W) + C3 (25W) + C4 (20W) + A1+C2(Total 5V 3A, 15W)



188W GaN T346C3Q2-188W (3C+2A)

- Input : AC 100-240V
- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / 28V 5A (140W); PPS: 3.3V-21V 5A
- USB-C3 PD: DC 5V 3A / 9V 3A / 12V 2.5A / 15V 2A / 20V 1.5A (30W);
PPS: 3.3-11V 3A / 3.3-16V 2A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A / 20V 1.5A (30W)
- USB-A2 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- USB-C1/C2+C3/A1+A2: C1/C2 (140W) + C3/A1(30W) + A2 (18W)
- USB-C1+C2+C3+A1+A2:C1(100W) + C2 (45W) + C3+A1(15W) + A2 (18W)



140W GaN

T383C3Q-140W (3C+1A)

- Input : AC 100-240V
- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A / 28V 5A (**140W**) PPS : 3.3V-21V 5A
- USB-C3 PD: DC 5V 3A/ 9V 2.22A/ 12V 1.67A (**20W**)
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)
- USB-C1+C2+C3+A1= C1(**65W**)+C2 (**45W**)+C3+A1(Total **15W**)



100W GaN

T345C3Q-100W (3C+1A)

- Input : AC 100-240V
- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 5V 3A / 20V 5A (**100W**) PPS:3.3-20V 5A
 - USB-C3 PD: DC 5V 3A / 9V 3V / 12V 2.5A / 15V 2A / 20V 1.5A (**30W**) PPS:3.3-11V 3A
 - USB-A1 QC: DC 5V 3A/9V 3V/12V 2.5A/20V 1.5A (**30W**)
 - C1+C2+C3+A1: C1(**45W**) + C2 (**30W**) + C3 (**7.5W**) + A1(**7.5W**)

100W GaN

T375C3Q-100W (3C+1A)

- Input : AC 100-240V
- USB-C1/C2 PD output : DC 5V 3A/ 9V 3A/ 12V 3A/15V 3A/ 20V 5A (**100W**); PPS: 3.3V-21V5A
- USB-C3 PD: DC 5V 3A/ 9V 3A/ 12V 2.5A/15V 2A/ 20V 1.5A (**30W**) PPS: 3.3V-11V 3A
- USB-A1 QC: DC 4.5V 5A / 5V 4.5A / 5V 3A / 9V 3A / 12V 2.5A (**30W**)
- USB-C1+C2+C3+A1= C1(45W)+C2(30W)+ C3+A1(Total **20W**)



100W GaN

T242C2Q2-100W (2C+2A)

● Input : AC 100-240V

Single port charging:

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (**100W**) PS:3.3-21V 5A
- USB-A1/2 QC:DC 5V 3A / 9V 3A / 12V 2.25A / 20V 1.35A (**27W**)
- USB-C1+C2+A1+A2: C1(**60W**)+C2(**20W**)+A1+A2(Total 5V 3A **15W**)



100W GaN T168C2Q2-100W (2C+2A)

● Input AC 100-240V

- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 5A (**100W**) PPS:3.3-21V 5A
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (**65W**) PPS: 3.3V-21V3A
- USB-A1/2 QC:DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)
- USB-C1+C2+A1+A2: C1(60W)+C2+A1+A2(Total 5V 4A **20W**)

65W GaN T168C2Q2-65W (2C+2A)

● Input AC 100-240V

- USB-C1/2 PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 3.25A (**65W**)
- USB-A1/2 QC: DC 5V 3A / 9V 2A / 12V 1.5A (**18W**)
- USB-C1+C2+A1+A2: Total Power 5V 3A (**15W**) Max

160W S201C2Q-160W (2C+1A)

- Input : DC 12-24V
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 5A (100W)
PPS:3.3-11V 3A/ 3.3-21V 5A
- USB-C2 PD: DC 5V 3A / 9V 3A/ 12V 2.5A (30W) ; PPS: 3.3-11V 3A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- Power : 160W



130W S201C2Q-130W (2C+1A)

- Input : DC 12-24V
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 5A (100W)
PPS: 3.3-11V 3A/ 3.3-21V 5A
- USB-C2 PD: DC 5V 3A / 9V 3A/ 12V 2.5A (30W) ; PPS: 3.3-11V 3A
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- USB-C1+C2: C1(100W) + C2 (30W)
- USB-C1+C2+A1: C1(100W) + C2+A1(Total 24W)

97W S152C2Q-97W (2C+1A)

- Input : DC 12-24V
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 3A /15V 3A / 20V 3.35A (67W)
- USB-C2 PD: DC 5V 3A / 9V 3A/ 12V 2.5A (30W)
- USB-A1 QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- USB-C1+C2/A1: C1(67W) + C2/A1(30W)
- USB-C1+C2+A1: C1(67W) + C2+A1(Total 5V 4A, 20W)



70W S151C2-70W (2C)

- Input : DC 12-24V
- USB-C1 PD: DC 5V 3A / 9V 3A / 12V 2.92A (35W)
- USB-C2 PD: DC 5V 3A / 9V 3A / 12V 2.92A (35W)
PPS: 3.3-11V 3A
- Power : 70W



65W S151CQ-65W (1C+1A)

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.92A (35W)
PPS: 3.3-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- Power : 65W



60W S254C2Q-60W (2C+1A)

- Input : DC 12-24V
- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W), PPS : 3.3-11V 3A
- USB-A1 QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- USB-C1+C2 : C1(30W) + C2 (30W)
- USB-C2+C1+A1 : C2(30W) + C1+A1(Total 5V 3.4A, 17W)

60W S253C2-60W (2C)

- Input : DC 12-24V
- USB-C1 PD: DC 5V 3A / 9V 3A/ 12V 2.5A (30W) ; PPS : 3.3-11V 3A
- USB-C2 PD: DC 5V 3A / 9V 3A/ 12V 2.5A (30W) ; PPS : 3.3-11V 3A
- Power : 60W

48W S253CQ-48W (1C+1A)

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W) ; PPS : 3.3-11V 3A
- 1 USB-A QCoutput : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- Power : 48W



48W S207CQ-48W (1C+1A)

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
PPS : 3.3-5.9V 3A / 3.3-11V 3A
- 1 USB-A QCoutput : DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- Power : 48W

38W S207CQ-38W (1C+1A)

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
PPS : 3.3-5.9V 3A / 3.3-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- Power : 38W



45W S261CQ-45W (1C+1A)

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 3A / 15V 3A / 20V 2.25A (45W)
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A / 20V 1.5A (30W)
- 2 ports charging: Total 5V 4A (20W)



30W S141C2-30W (2C)

- Input : DC 12-24V
- USB-C1/C2 PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- 2 USB: Total 5V 4A (20W) Max

38W S301CQ-38W-GRS (1C+1A)

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 2.22A / 12V 1.67A (20W)
PPS : 3.3-5.9V 3A / 3.3-11V 3A
- 1 USB-A QC: DC 5V 3A / 9V 2A / 12V 1.5A (18W)
- Power : 38W



25W S301C-25W-GRS (1C)

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 2.77A / 12V 2.08A (25W)
PPS : 3.6-5.9V 3A / 3.6-11V 2.25A



30W S141CQ-30W (1C+1A)

- Input : DC 12-24V
- 1 USB-C PD: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- 1 USB-A QC: DC 5V 3A / 9V 3A / 12V 2.5A (30W)
- 2 USB: Total 5V 4A (20W) Max

WP131T-Q2

Qi2 Magsafe Wireless Charger

- qi2 Certified
- Wireless output: 5W / 7.5W / 10W/ 15W
- **15W max** For iPhone 12 / 13 / 14 / 15 / 16 Series
- Input: Built-in Type-C Fixed cable (PD20W)
- Material: ABS+Aluminum Alloy



WP12T-Q2

Qi2 Magsafe Wireless Charger

- qi2 Certified
- Wireless output: 5W / 7.5W / 10W/ 15W
- **15W max** For iPhone 12 / 13 / 14 / 15 / 16 Series
- Input: Built-in Type-C Fixed cable (PD20W)
- Material: PC+Aluminum Alloy



WP132T-Q2

Qi2 Magsafe Wireless In-Car Charger Mount With Air Vent Clip

- qi2 Certified
- Wireless output: 5W / 7.5W / 10W/ 15W
- **15W max** For iPhone 12/13/14/15/16 Series
- Input: Type-C Port (PD20W)
- Material: ABS+Aluminum Alloy



WP200T-Q2-GRS

Qi2 Magsafe Wireless Charger

- qi2 Certified
- Wireless output: 5W / 7.5W / 10W/ 15W
- **15W max** For iPhone 12 / 13 / 14 / 15 / 16 Series
- Input: Built-in Type-C Fixed cable (PD20W)
- Material: **Recycled Aluminum+PC+ABS**



WP120T2C-Q2

2 in 1 Qi2 Magsafe Wireless Charge

- Qi2 Certified (Wireless output : 5W / 7.5W / 10W /15W)
- **15W Magsafe charger for iPhone 12/13/14/15 Series**
- 5W Wireless Charger Pad for Apple Airpods
- Extra USB-C port output : for Applewatch or other device: 5W
- USB Type-C Input : PD30W
- Material: White color + Silver Zinc Alloy pole without oiltreatment



WP135T3-Q2

3 in 1 Qi2 Magsafe Wireless Charge

- Qi2 Certified (Wireless output : 5W / 7.5W / 10W /15W)
- **15W Magsafe charger for iPhone 12/13/14/15 Series**
- 5W Wireless Charger Pad for Apple Airpods
- 2.5W Wireless Charger Pad for Apple Watch
- USB Type-C Input : PD20W/30W
- Material: ABS+Electroplating effect



WP203T-5K20WQ2-GRS

Qi2 Magsafe Power Bank


- Qi2 Certified (Wireless output : 5W / 7.5W / 10W /15W)
- **15W Magsafe charger for iPhone 12/13/14/15 Series**
- USB-C Input: 5V 3A / 9V 2A (18W)
- Output : 5V 3A / 9V 2.22A /12V 1.67A (20W)
- Capacity : **5,000mAh**, Li-polymer battery
- Power Indicator : LED power Indicator
- Material: **Recycled PC+ABS**

WP107T-10K20WQ2

Qi2 Magsafe Power Bank

- Qi2 Certified (Wireless output : 5W / 7.5W / 10W /15W)
- **15W Magsafe charger for iPhone 12/13/14/15 Series**
- USB-C Input : 5V 3A / 9V 2A / 12V 1.5A /
- Output : 5V 3A / 9V 2.22A /12V 1.67A (20W)
- Capacity : **10,000mAh**, Li-polymer battery
- Power Indicator : LED power Indicator
- Material: ABS , black/ white colors



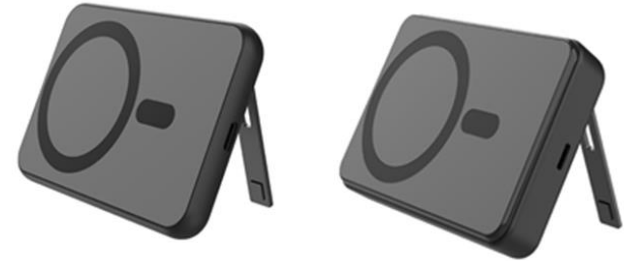

WP83T-5K20W (5,000mAh)

WP83T-10K20W (10,000mAh)

Magsafe Power Bank

- Compatible with Qi Standard (Wireless output : 5W / 7.5W / 10W /15W)
- 15W Magsafe charger for iPhone 12-15 (7.5W)
and all Qi-enabled phones (15W max)
- Capacity : 5,000mAh, Li-polymer battery ; Dimension: 100*68*11mm
- Capacity : 10,000mAh, Li-polymer battery ; Dimension: 100*65*18mm
- Power Indicator : LED power Indicator
- USB-C PD Input : 5V 3A / 9V 2A /12V 1.5A /
Output : 5V 3A / 9V 2.22A /12V 1.67A(20W)
- Material: ABS ; Color : Black / White / Green / Purple

WP205T-5K20W-GRS(5,000mAh)

WP205T-10K20W-GRS (10,000mAh)

Magsafe Power Bank

- Compatible with Qi Standard (Wireless output : 5W / 7.5W / 10W /15W)
- 15W Magsafe charger for iPhone 12-15 (7.5W)
and all Qi-enabled phones (15W max)
- Capacity : 5,000mAh, Li-polymer battery ; Dimension: 102*67*11mm
- Capacity : 10,000mAh, Li-polymer battery ; Dimension: 103*68*19mm
- Power Indicator : LED power Indicator
- USB-C PD Input : 5V 3A / 9V 2A /12V 1.5A /
Output : 5V 3A / 9V 2.22A /12V 1.67A(20W)
- * **Material: Recycled PB+ABS+Zinc alloy**

USB4 40Gbps

DC223-CC4-40G1M

DC223-CC4-40G2M

- USB 4 Type-C to Type-C Sync Charge Cable (E-Marker)
- Supports high power delivery up to 240W(48V 5A)
- 40Gbps data speed, Supports 8K@60Hz resolution
- USB Version: USB 4, Gen3, 40Gbps 5A (240W max)
- Housing Material: Aluminum
- Cable Material: Nylon braided



DC175-CC2-240W

With LCD Digital Display.

USB2.0 240W

DC192-CC2-240W

- Supports USB Power Delivery up to 240W (48V 5A)
- With E-Marker chip.
- USB Version : USB 2.0, 480Mbps 5A (240W max)
- Housing Material: Aluminum
- Cable Material: Nylon braided

USB3.2 10Gbps

DC167-CC3-10G1M

DC167-CC3-10G2M

- USB 3.2 SuperSpeed for USB-C 4K monitors, external hard drives, SSDs..etc.
- USB Version : USB 3.2, Gen2, 10Gbps 5A (100W max)
- Housing Material: PVC molding
- Cable Material: PVC



PFC USB-C Cable


DC277-CC4-40G240W

DC277-CC4-40G100W

DC277-CC3-10G60W

Made of strong **FPC** flexible core jacket and unique **FPC flexible flat cable**.

- USB Version : USB 4, Gen3, 40Gbps 5A (240W max)
- USB Version : USB 4, Gen3, 40Gbps 5A (100W max)
- USB Version : USB 3.2, Gen2, 10Gbps 3A (60W max)
- Housing Material: Aluminum
- Cable Material: PFC with PVC jacket flat cable
- Cable Length: 13cm

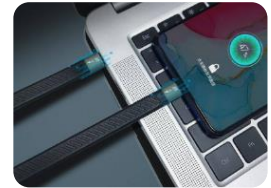

USB2.0 Type-C to Type-C Cable

DC15-CC2



- USB 2.0 , 480Mbps 3A (60W max)
- ABS (Ultra-thin housing)
- Nylon Braided Cable

DC136-CC2



- USB 2.0 , 480Mbps 3A (60W max)
- Housing Material: TPE
- Cable Material: TPE



USB2.0

With Magnetic Cable Coil

DC158-CC2 / DC158-CA2

- Gauss Value : 600G

USB Version: USB 2.0, 480Mbps, 3A (60W max)

- A to C1.0M Cable: 22AWG*2C+28AWG*2C ; OD 4.0mm
- A to C1.5M Cable: 21AWG*2C+28AWG*2C ; OD 4.0mm
- A to C2.0M Cable: 21AWG*2C+28AWG*2C ; OD 4.0mm
- C to C1.0M Cable: 22AWG*2C+28AWG*2C ; OD 4.0mm
- C to C1.5M Cable: 21AWG*2C+28AWG*2C ; OD 4.0mm
- C to C2.0M Cable: 21AWG*2C+28AWG*2C ; OD 4.0mm
- Housing Material: Aluminum
- Cable Material : Nylon braided
- Color : Black / Gray / White

DC82-CC2



- USB 2.0 , 480Mbps 3A (60W max)
- Housing Material: PVC
- Cable Material: Nylon braided

DC132-CC2



- USB 2.0 , 480Mbps 3A (60W max)
- Housing Material: TPE molding
- Cable Material: Ultra Soft Silicone Cable

USB-C 3.2 to USB-A DC91-CA3

1M Cable:

- USB 3.2, Gen2 10Gbps 3A (60W max)

2M Cable:

- USB 3.2, Gen1 5Gbps 3A (60W max)
- Housing Material : PVC molding
- Cable Material : PVC



USB-C 2.0 to USB-A DC46-CA2

- USB 2.0, 480Mbps, 2A (Fast Charging)
- 1m /2m Cable
- Color : White , Black · Red, Gold, Pink, Grey



DC122-CA2

- USB 2.0, 480Mbps 3A (60W max)
- TPE Housing
- Ultra Soft Silicone Cable
- 1m /2m Cable

DC82-CA2

- USB 2.0, 480Mbps 2A
- Housing Material : PVC
- Cable Material: Nylon braided
- 1m /2m Cable



2 in 1 Multi USB 2.0 Cable DC126-ACM

- USB-C / USB-A to USB-C cable
- USB 2.0, 480Mbps
- USB-C to C: **PD100W**
- USB-A to C: **PD27W**
- Housing Material : PC+ABS (Translucent housing)
- Connector Material : Aluminum
- Cable Material : TPE Flat cable
- 1M Cable



2 in 1 Multi USB 2.0 Cable DC187-ACM

- USB-A to Type-C and Micro USB cable
- USB 2.0, 480Mbps 2A
- Housing Material : Aluminum
- Cable Material : Nylon braided
- 1m Cable



6 in 1 Multi USB 2.0 Cable DC222-K6

- USB-A to USB Type-C / Non-MFI Lightning
- USB-C to USB Type-C / Non-MFI Lightning
- USB 2.0, 480Mbps 2A
- Aluminum with Nylon braided
- 1.2m Cable



Made for
iPhone | iPad | iPod


2 in 1 MFI C94 IC USB-C to USB-C & Apple Lightning Cable MFI-DC35-CCL

- USB version : USB 2.0, 480Mbps
- Currency : 3A (20V 3A, 60W Max)
- TPE molding with Braided
- Color : White / Black / Blue / OEM colors
- 1M/2M Cable



USB-A Female to USB-C OTG Dongle Adapter OTG38-AC3

- USB 3.2 (5Gbps 3A)
- Aluminum Housing
- 10cm Cable



USB-A Female to USB-C OTG Dongle Adapter OTG77-AC3

- USB 3.2 (5Gbps 3A)
- Aluminum alloy Housing



USB-C Female to Lightning Male Adapter CAD20-CL2

- USB 2.0, 480Mbps 2.4A
- Aluminum alloy Housing



Lightning Female to USB-C Male Adapter CAD42-LC2

- USB 2.0, 480Mbps PD27W(9V 3A)
- Aluminum alloy Housing



Battery Chargers for E-Scooters

BC84W-OK

84W Battery Charger for OKAI 42V 2A Electric Scooter Models EA10, ES50B, ES10, ES20, ES520B.

- OCP / OVP / OTP / SCP / RPP/ Timing Protection / Cut off Protection
- AC Input Voltage Range: AC90V~AC264V
- Output Voltage: 42V • Output Current: 2A • Output Power: 84W Max
- AC Cable: EU plug, 1.2 m • DC Cable: 2m



BC84W-K3A

84W Battery Charger for Other Models of E-Scooters

- OCP / OVP / OTP / SCP / RPP/ Timing Protection / Cut off Protection

Power for the following E-Scooter Models

- GX12 (3 pin) connector for MPMAN® TR100, CSSO
- Xiaomi connector for XIAOMI® M365, Pro, Pro 2, SEGWAY® NINEBOT® ES1, ES2, ES3, ES4, MAX G30
- DC Jack (5.5*2.5) connector for CECOTEC® Outsider E-volution 8.5 Phoenix
- FORCEMOOVE® Supreme 6400; GO RIDE® 80 Pro; ION® "8" Harlow ; OLSSON®



Also available from our range

84W to 900W Battery Chargers

For battery-operated devices, equipment and tools



Products Trending 2025



2001 Technology Incorporated
Since 1989

Powerhouse for
**Accessories
& Peripherals**

For all categories of
electronic devices



Sonexco

**Dongguan SONEXCO Asia
Electronics Technology Co., Ltd.**
A China-registered subsidiary company of
2001 Technology Incorporated.

